

BALDOR® • RELIANCE

Product Information Packet

GC3325

G.M.115VAC 11:1 151RPM

Part Detail							
Revision:	W	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3324S	Elec. Spec:	33WGW134	CD Diagram:	CD0182A01
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:		Layout:	33E324W134G1K2
Frame:	JK	Mounting:		Poles:	04	Created Date:	08-19-2005
Base:		Rotation:	R	Insulation:	F	Eff. Date:	09-28-2016
Leads:	4#18	Y				Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1220A07

CAT.NO.	GC3325		
SER.NO			
SPEC.	33E324W134G1K2		
HP	.25	TE	
VOLTS	115		
AMP	4.2		
HZ	60	PH	1
AMB.	40	DUTY	CONT
CAP		CODE	P
SER.F.	1.0	CLASS	F
R.P.M.	151		
TORQ/IN LB	70		
RATIO	11:1		
APRV-CSA		APRV-UL	


Parts List		
Part Number	Description	Quantity
SA229892	SA 33E324W134G1K2	1.000 EA
RA216933	RA 33E324W134G1K2	1.000 EA
SR001592	SR 33E324W134G1K2	1.000 EA
LC0017	CONN LABEL-1 PHASE-SINGLE VOLT-REV ROTNO	1.000 EA
33EP3300A22	EP,33AC DE CL 6203 42C	1.000 EA
10XN2520A16	1/4-20 X 1 HEX HEAD CAP SCR, ZINC PLATED	4.000 EA
HG0039A01	HSG,J EP OPEN FOR SEAL	1.000 EA
WM0055A04	WORM,JC 11.0 INP	1.000 EA
MJ5019A01	ADHESIVE LOCTITE #680 WAS BAD4525	0.010 EA
34GS1029A01	GASKET, CONDUIT BOX	1.000 EA
34CB3002C	CB CAST W/.69 DIA HOLE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
34GS1031A01	GASKET, FLAT CONDUIT BOX LID (LEXIDE)	1.000 EA
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HA3100A13	THRUBOLT 10-32 X 7.750	2.000 EA
33EP3100A01SP	EP,33AC ODE GP 6203 TEFC W/DRAIN	1.000 EA
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 EA
33FN3000SP	EXTERNAL FAN, PLASTIC	1.000 EA
HW1003A08	WASHER, #8 EX TH LK, ZN (F/S)	1.000 EA
33FH4001A01	FAN COVER, STAMPED	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
HA6032A04	ADAPTER, MACH F/BOEHM MACH'D. FOR SEAL	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
HW4600B91	SEAL, TCM #06132TB .625X1.375X.252	1.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 EA
HW5109A05	WASHER, WAVE SPRING FOR 40MM BORE SMALLE	1.000 EA
SP5183	TORQ STA. SWITCH 200 SERIES MODEL 33	1.000 EA
LD2004A13	ASM,1LD 18 RED 8 11.0" INS FLAG TERM	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
RM1057	RUBBER SQUARE RING 1.424 I.D.	1.000 EA
HW4600G71	SEAL, .750 X 1.250 X .250 SGL LIP FT802	1.000 EA
19XN1032A12	SCREW, HEX WASHER HEAD, #10-32 X .750	4.000 EA
HA4021A05	1/16 NPSF-HX SOC PIPE PLUG TAPER DRY SEA	1.000 EA
HA1194B01	BLADDER,CJK EXPANSION	1.000 EA
15XM0632A06	SCREW, 6-32X .375, THREAD FORMING	3.000 EA
BS0114A03	BS,J OP 6204STD OPEN NO SNAP RING	1.000 EA
HW4600G71	SEAL, .750 X 1.250 X .250 SGL LIP FT802	1.000 EA
HW5109A10	WASHER, WAVE SPRING FOR 47MM BORE SMALLE	1.000 EA
BG6204C03	6204 D.SH,C3,POLYREX EM	1.000 EA
60XM0832A08	SCREW, PAN TORX 8-32X.500 THREAD FORMING	4.000 EA
RM1020A21	O-RING,3.240 I.D. X .052 BUNA-N (NITRILE	1.000 EA
HW2501D10	KEY, 3/16 SQ X 1.000	2.000 EA
ME4000	.375-.75" DIA.#SW-04 WOVEN SHAFT PROTECT	0.250 FT
MJ1000B02	KLUB. GH6-460 GEAR OIL 1 GALLON	0.033 GA
MG1000G27	S-9282E MED CHARCOAL METALLIC GREY	0.030 GA
NP1220A07	NP,AC STD AD NONE V CSA UL GEAR MOTOR	1.000 EA
LB1119N	WARNING LABEL	1.000 EA



Product Information Packet: GC3325 - G.M.115VAC 11:1 151RPM

MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA
CPA1001	PACKING GROUP OVERSIZED SINGLE	1.000 EA
PK3083T	STYROFOAM PACKING CRADLE W/TAPE	1.000 EA

No performance data has been
assigned to this product.

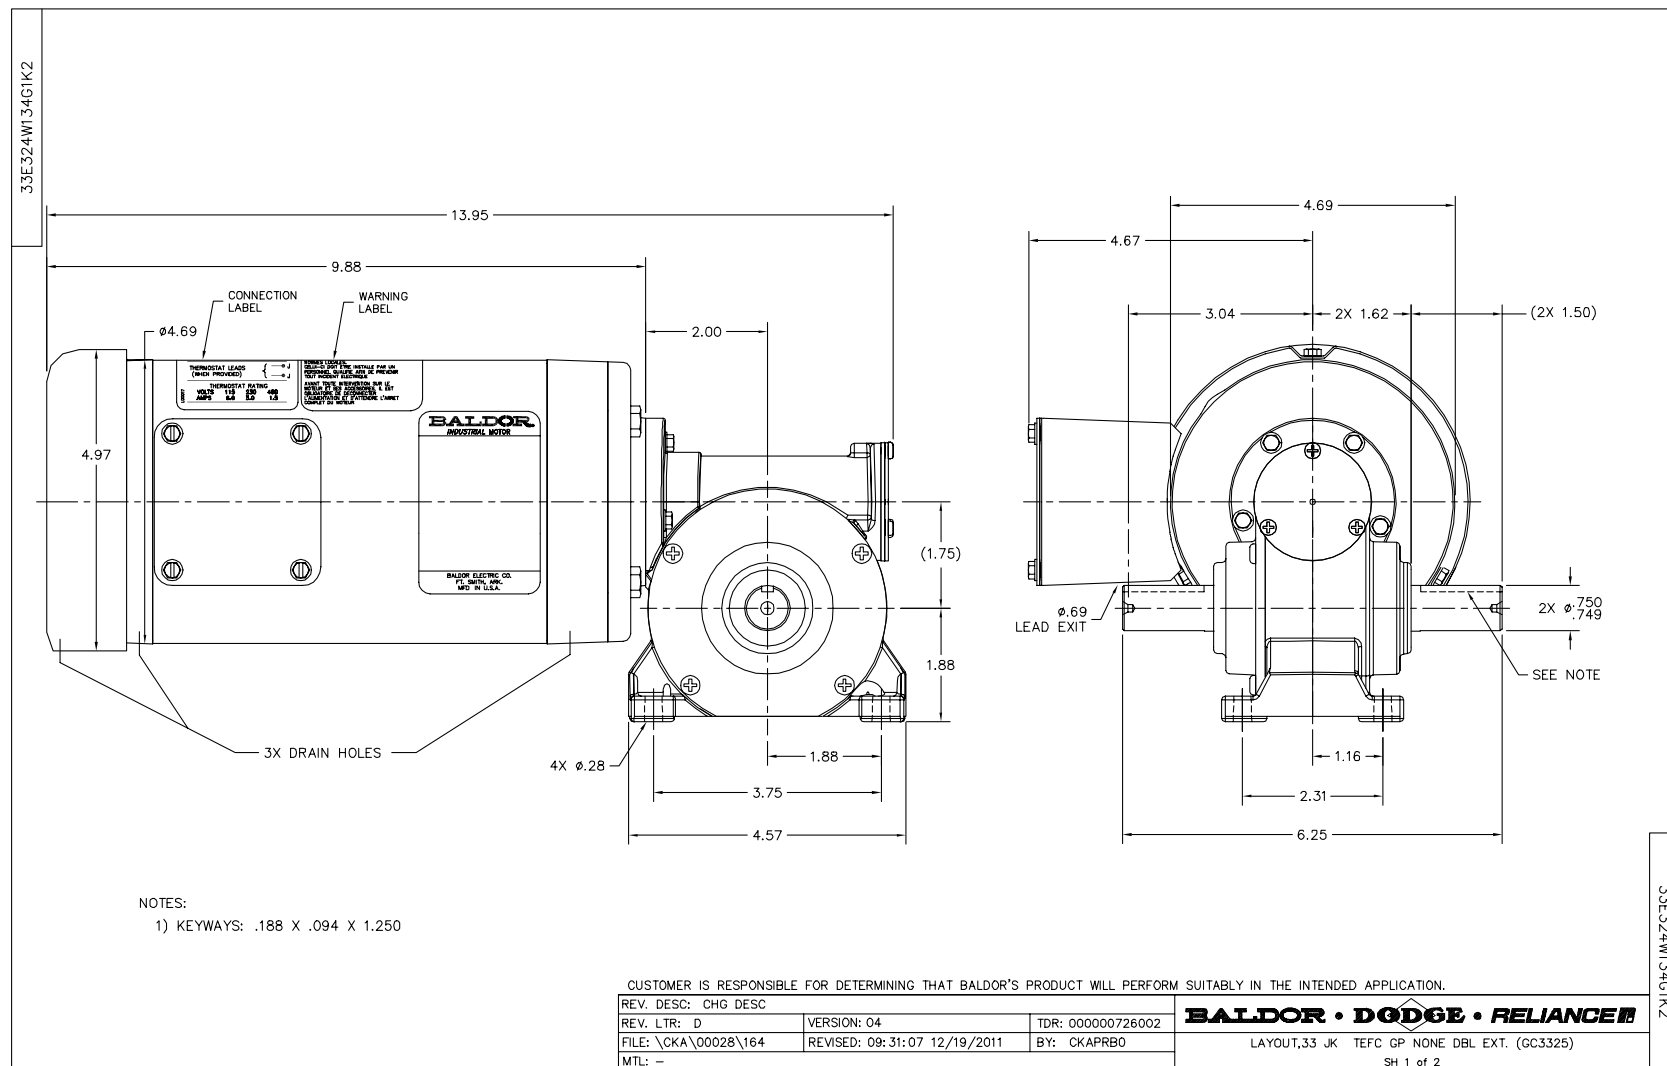


33E324W134G1K2

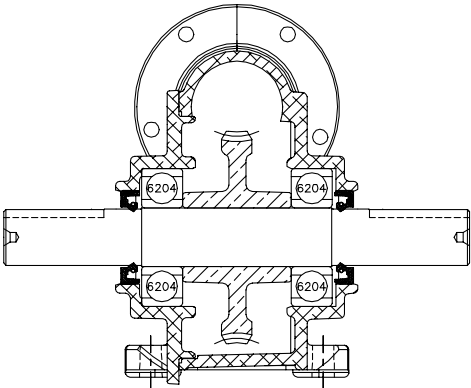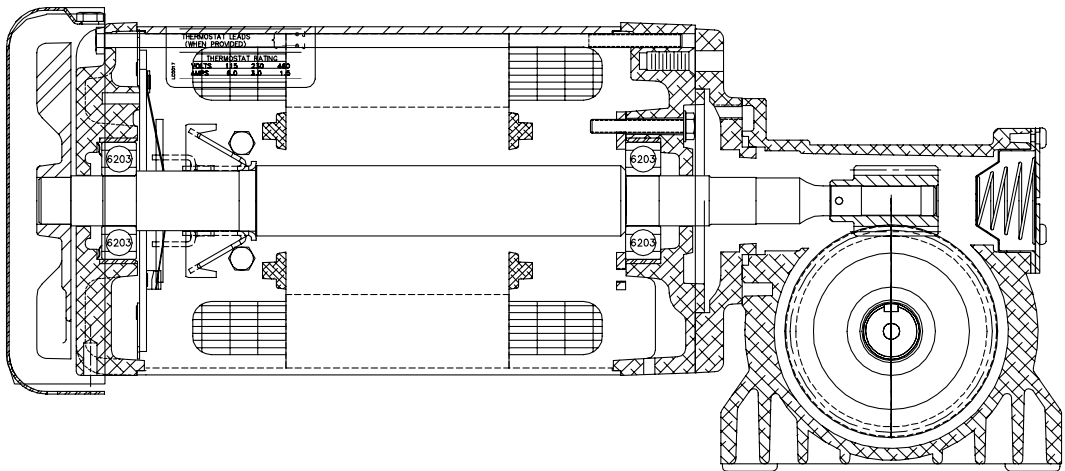


33E324W134G1K2

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.			BALDOR • DODGE • RELIANCE
REV. DESC: CHG DESC			
REV. LTR: D	VERSION: 04	TDR: 000000726002	
FILE: \CKA\00028\164	REVISED: 09:31:07 12/19/2011	BY: CKAPRB0	
MTL: -			
LAYOUT,33 JK TEFC GP NONE DBL EXT. (GC3325)			
SH 2 of 2			

CD0182

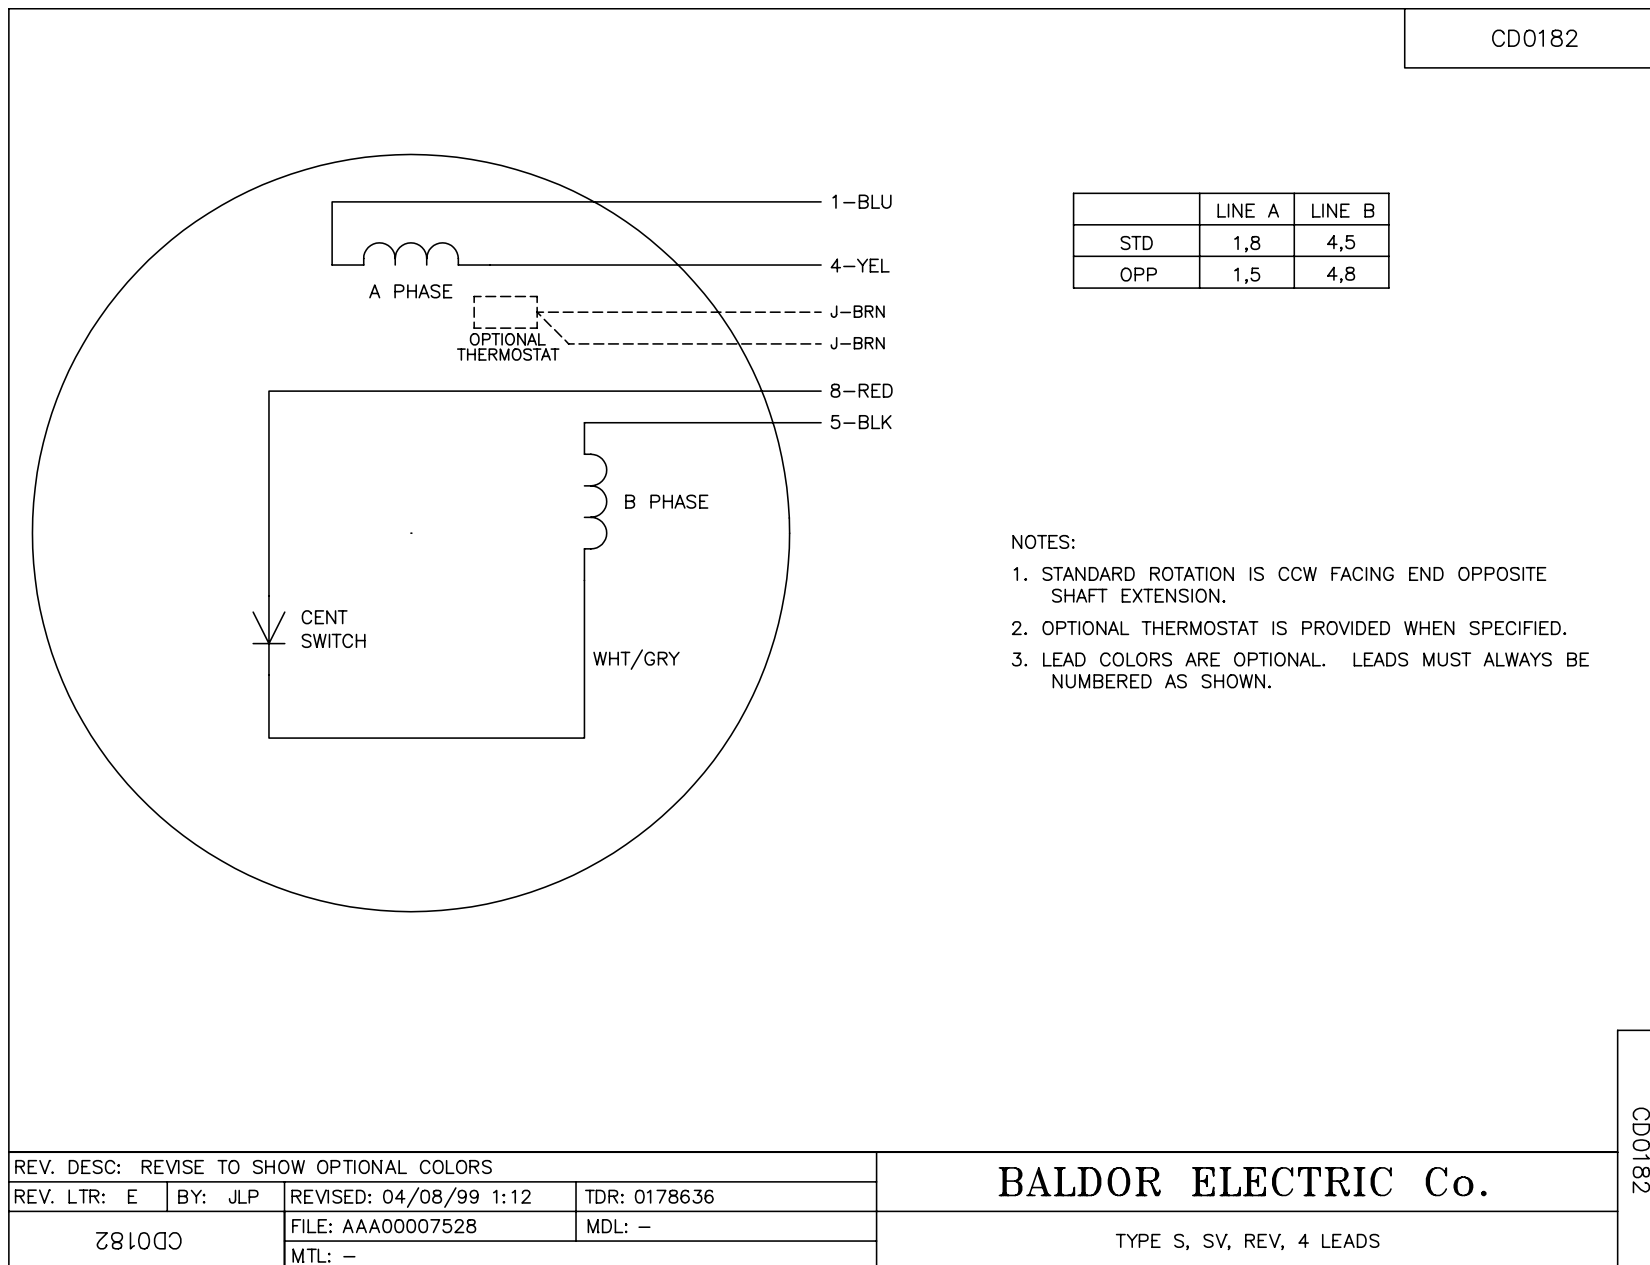

CD0182A01

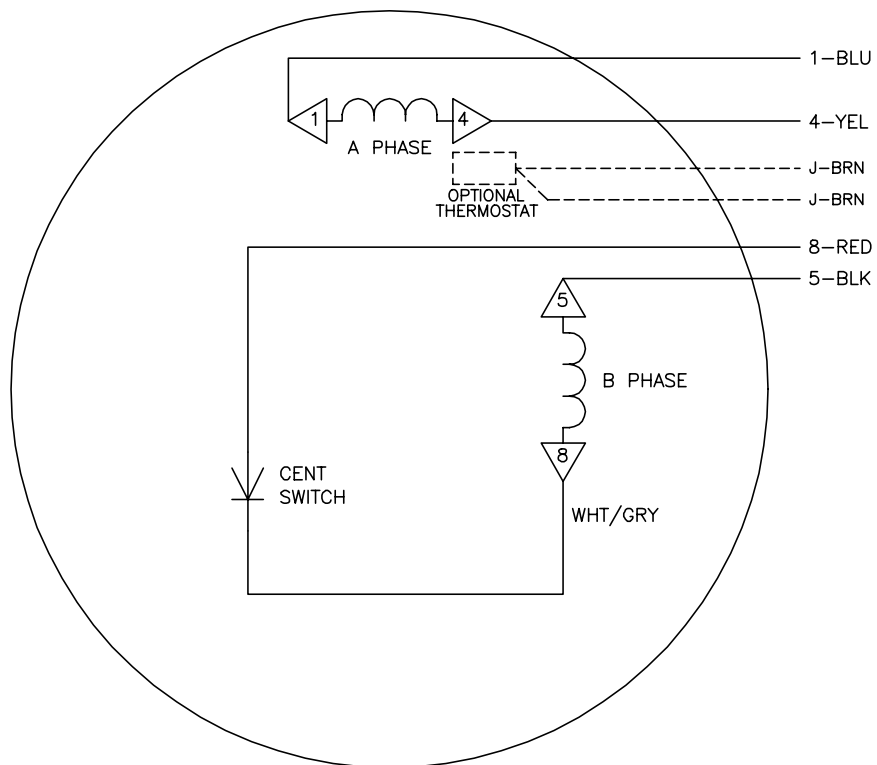

	LINE A	LINE B
STD	1,8	4,5
OPP	1,5	4,8

NOTES:

1. STANDARD ROTATION IS CCW FACING LEAD END
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.
4.  = MAGNET WIRE COIL END WITH I.D. NUMBER

REV. DESC: NEW		
REV. LTR: -	VERSION: 00	TDR: 000000435106
10VZ81000	FILE: \CKA\00032\298	REVISED: 15:19:10 06/19/2007
CD0182A01	MTL: -	BY: CKNATLO

Baldor • Dodge • Reliance

TYPE S, SV, REV, 4 LD, CK

CD0182A01