

SLIDE RAIL COUPLING SRC-6

To be used with
6BSE & 6SW series pumps



LOCATION

This SRC-6 is designed for wet wells, tanks, or lift stations where it is necessary to remove a pump from service and reinstall the pump without maintenance personnel entering the pit to unbolt the pump flanges.

STATIONARY ELBOW

Cast iron ASTM A-48 class 30

MOVABLE FITTING

Ductile iron ASTM A-536

GUIDE RAIL CAP

Bracket: 304 stainless steel

Plugs: ductile iron ASTM A-536-84

HARDWARE

304 series stainless steel

O-RINGS


Buna-N, 70 ±5 Duro.

GASKETS




Rubber

PAINT

Air dry enamel, water based.


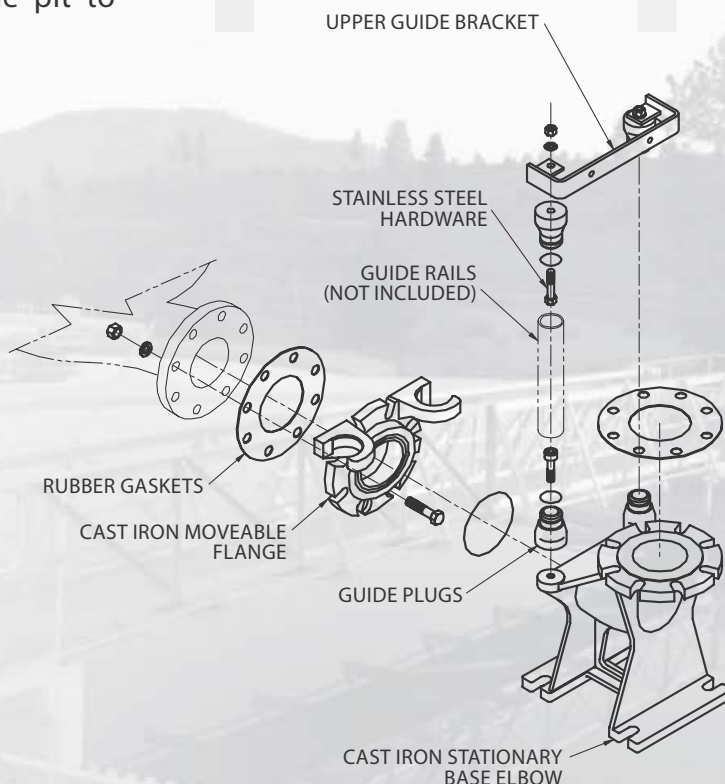


inches
(mm)

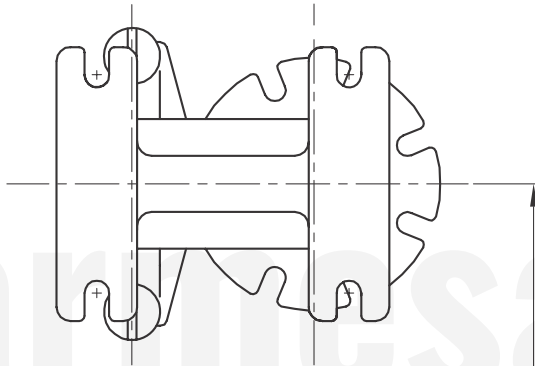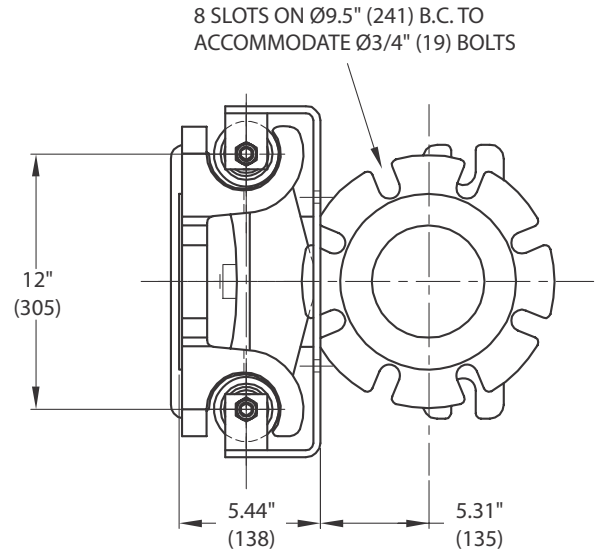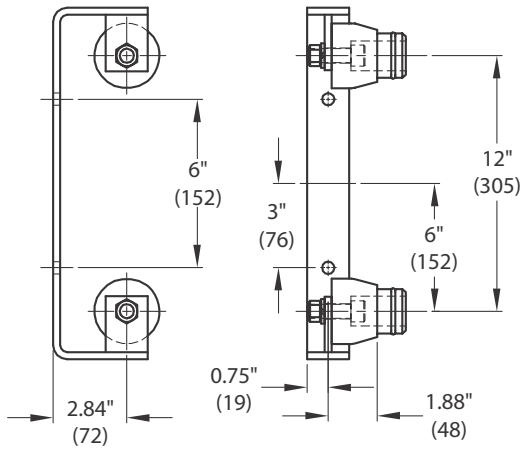

4 SLOTS TO ACCOMMODATE
Ø3/4" (19) ANCHOR BOLTS

DUPLEX = 26" (660) TO 32.25" (819)

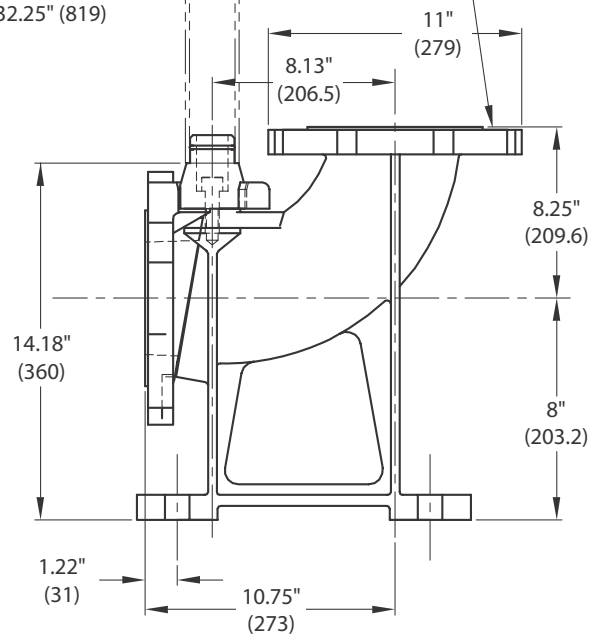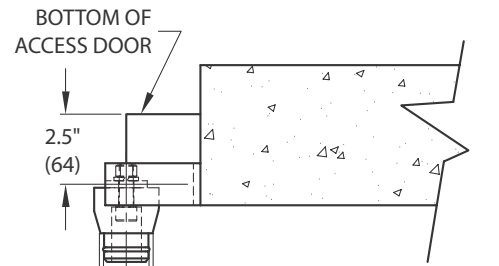

MODEL	PART No.	SIZE	RAILS	COUPLING	WEIGHT (pounds)
SRC6	62170802	6"	2"	w/ upper guide bracket	180