



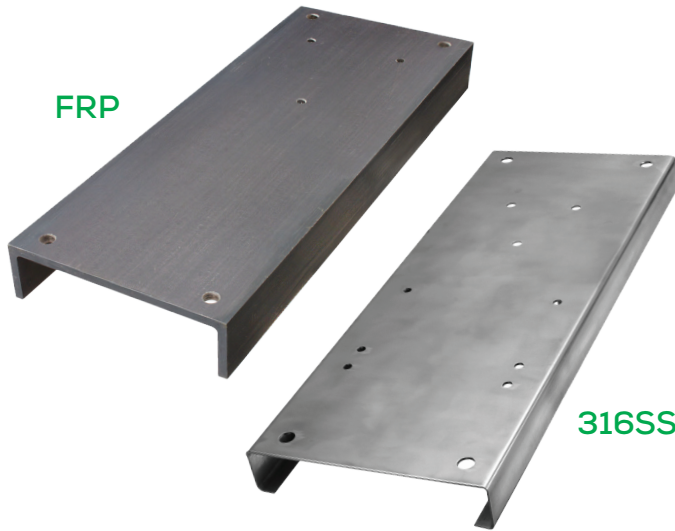

FRP

316SS

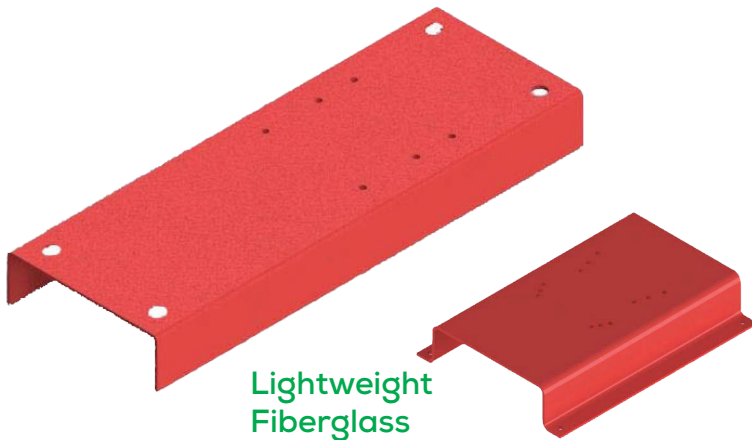

Lightweight
Fiberglass

FEATURES


- Corrosion resistant
- FRP (fiberglass reinforced plastic), light weight fiberglass, or 316SS construction
- Stainless steel shims & hardware
- Premachined to precisely fit DB or SP Series pumps and motors

BENEFITS

- Keeps pump and motor off the floor - prevents corrosion
- Lifts pump and motor an additional 2" (5.08 cm) to help prevent damage from floods or spills
- Elevation allows access for safe cleanup of spills

OPTIONS

- Grout holes
- Stainless steel adjustable leveling feet
- Custom sizes and materials available.

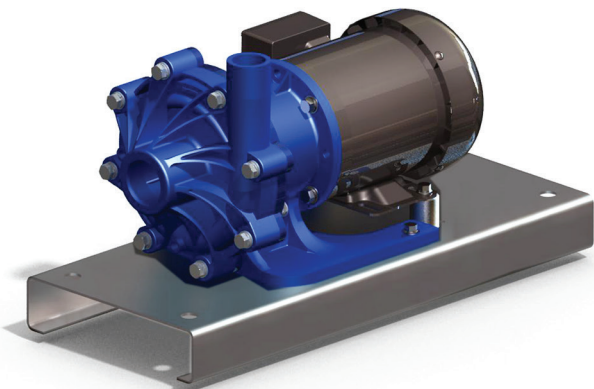


DB11P with 316SS baseplate



SP10V with FRP baseplate

Shim Kits

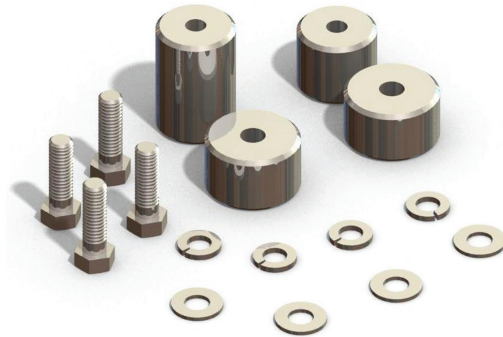

A shim kit based on the motor frame is included with each baseplate. Shims and hardware are stainless steel construction.

Close Coupled Pump Baseplates

Part Number	Frame	Material	Models	Dimensions		Weight	
				in.	cm	lbs.	kg
108000*	IEC 56	Fiberglass	DB3-5	13 x 9.5 x 2.4	33 x 24.1 x 6	2.2	.91
108001*	IEC 63/71	Fiberglass	DB3-5.5	13 x 9.5 x 2.4	33 x 24.1 x 6	2.2	.91
108011-1*	56C**	Fiberglass	DB6-10, SP10	24 x 8.5 x 2.7	61 x 21.6 x 7	3.6	1.6
108011-2*	145TC	Fiberglass	DB6-10, SP10	24 x 8.5 x 2.7	61 x 21.6 x 7	3.6	1.6
107528-1	56C**	Fiberglass	DB6-10, SP10	24 x 10 x 2.75	61 x 25.4 x 7	16	7.3
107528-33	56C**	316SS	DB6-10, SP10	24 x 10 x 2.5	61 x 25.4 x 6.4	16	7.3
107528-2	145TC	Fiberglass	DB6-10, SP10	24 x 10 x 2.75	61 x 25.4 x 7	16	7.3
107528-34	145TC	316SS	DB6-10, SP10	24 x 10 x 2.5	61 x 25.4 x 6.4	16	7.3
107528-7	56C**	Fiberglass	DB11-15	24 x 10 x 2.75	61 x 25.4 x 7	16	7.3
107528-39	56C**	316SS	DB11-15	24 x 10 x 2.5	61 x 25.4 x 6.4	16	7.3
107528-8	145TC	Fiberglass	DB11-15	24 x 10 x 2.75	61 x 25.4 x 7	16	7.3
107528-40	145TC	316SS	DB11-15	24 x 10 x 2.5	61 x 25.4 x 6.4	16	7.3
107528-9	182-184TC	Fiberglass	DB11-15	24 x 10 x 2.75	61 x 25.4 x 7	16	7.3
107528-41	182-184TC	316SS	DB11-15	24 x 10 x 2.5	61 x 25.4 x 6.4	16	7.3
107528-14	56C**	Fiberglass	SP11-15/MSDB	30.5 x 12 x 2.75	77.5 x 30.5 x 7	23	10.4
107528-46	56C**	316SS	SP11-15/MSDB	30.5 x 12 x 2.5	77.5 x 30.5 x 6.4	23	10.4
107528-15	145TC	Fiberglass	SP11-15/MSDB	30.5 x 12 x 2.75	77.5 x 30.5 x 7	23	10.4
107528-47	145TC	316SS	SP11-15/MSDB	30.5 x 12 x 2.5	77.5 x 30.5 x 6.4	23	10.4
107528-16	182-184TC	Fiberglass	SP11-15/MSDB	30.5 x 12 x 2.75	77.5 x 30.5 x 7	23	10.4
107528-48	182-184TC	316SS	SP11-15/MSDB	30.5 x 12 x 2.5	77.5 x 30.5 x 6.4	23	10.4
107528-21	182-184TC	Fiberglass	DB22	30.5 x 12 x 2.75	77.5 x 30.5 x 7	23	10.4
107528-53	182-184TC	316SS	DB22	30.5 x 12 x 2.5	77.5 x 30.5 x 6.4	23	10.4
107528-22	213-215TC	Fiberglass	DB22	30.5 x 12 x 2.75	77.5 x 30.5 x 7	23	10.4
107528-54	213-215TC	316SS	DB22	30.5 x 12 x 2.5	77.5 x 30.5 x 6.4	23	10.4
107528-27	213-215TC	Fiberglass	SP22	39 x 12 x 2.75	99.1 x 30.5 x 7	28	12.7
107528-59	213-215TC	316SS	SP22	39 x 12 x 2.5	99.1 x 30.5 x 6.4	28	12.7
107528-28	213-215TC	Fiberglass	SP22	39 x 12 x 2.75	99.1 x 30.5 x 7	28	12.7
107528-60	213-215TC	316SS	SP22	39 x 12 x 2.5	99.1 x 30.5 x 6.4	28	12.7

NOTE: Above baseplates include shims, hardware and labor. Contact the factory for metric frame bases.

*Light duty fiberglass (3/16" thick)

**Motor feet must be slotted