



a xylem brand




REPAIR PARTS

RSSHSMGR R4

Questions? Call **1-800-810-1053**

SSH REPAIR PARTS

Effective January, 2016

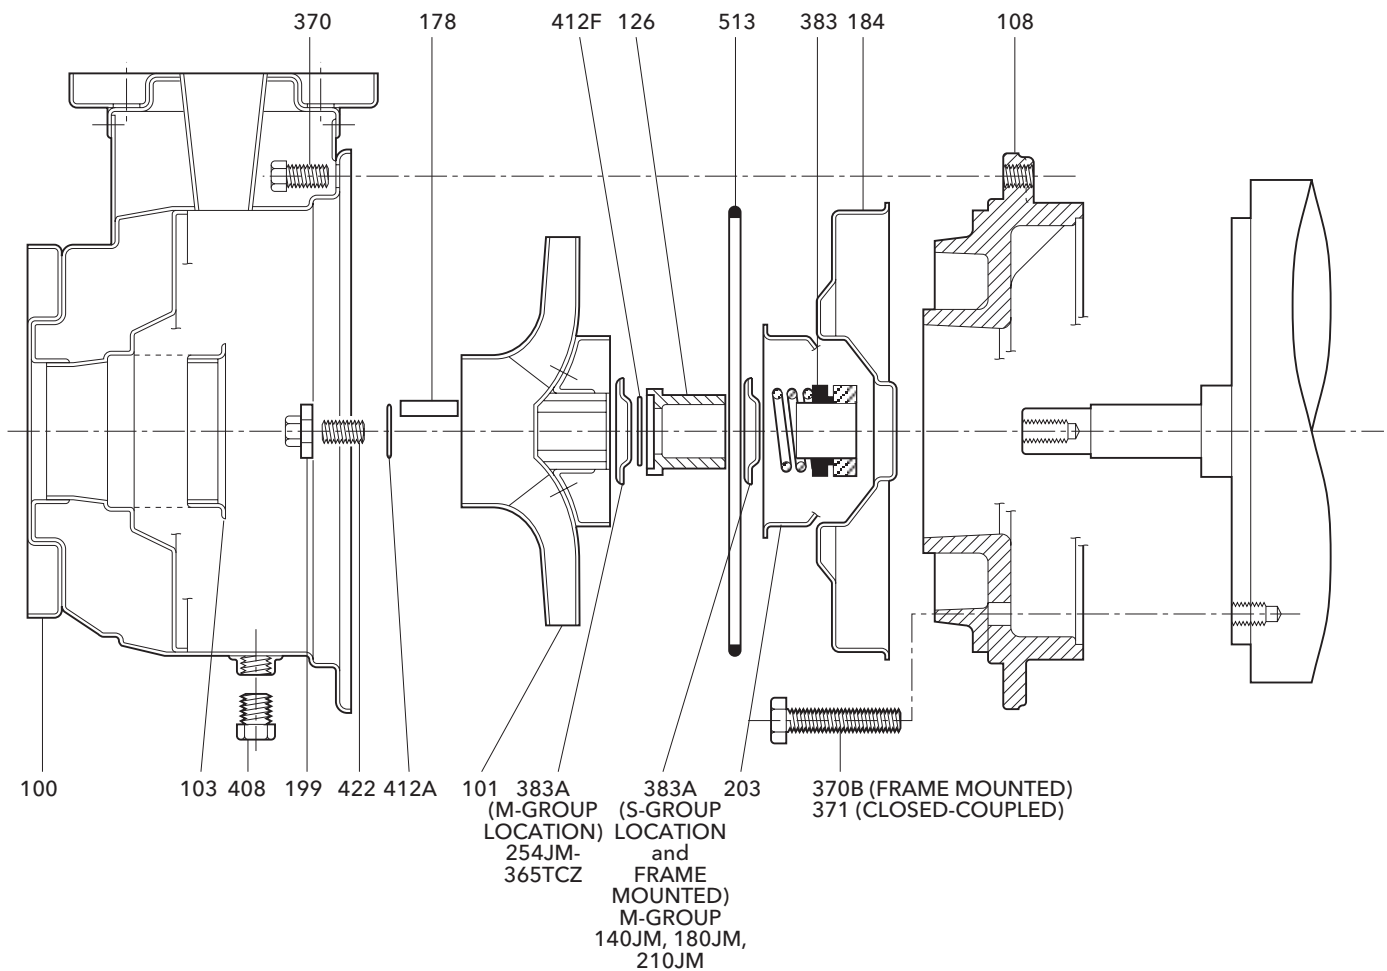

SSH S-GROUP

Item No.	Part Description	Material	1 x 2-6		1½ x 2½-6		2 x 2½-6		2½ x 3-6		1 x 2-8		1½ x 2½-8		2 x 2½-8		1 x 2-10		Max. Wt. (lbs.)		
			①	②	4SH	5SH	6SH	①		7SH	8SH	①									
			9SH 9A-SH	9SH Before Jan. 2003				10SH 10A-SH	10SH Before Jan. 2003			11SH 11-SH	11SH Before Jan. 2003								
100	Casing with wear ring	AISI Type 316SS	1L450		1L453		1L456		1L459		1L451		1L454		1L457		1L452		17		
101	Impeller		6⅝	2L889	2L856	6¾	2L876	6⅞	2L766	7⅞	2L771	8 ²⁷ / ₆₄	2L898		8¼	2L879	8¼	2L770	10 ³ / ₃₂	2L897	2L865
			6⅞	2L888	2L733	6⅞	2L874	6⅞	2L765	7⅞	2L772	8⅞	2L893	2L861	7 ¹³ / ₁₆	2L878	7¾	2L769	9 ¹⁷ / ₃₂	2L896	2L742
			5 ¹¹ / ₁₆	2L887	2L853	6⅞	2L872	5 ¹³ / ₁₆	2L763	6 ¹⁵ / ₁₆	2L773	7 ¹¹ / ₁₆	2L892	2L859	7	2L877	7½	2L768	9⅞	2L895	2L863
			5⅝	2L886	2L730	5⅝	2L871	5½	2L882	6 ¹¹ / ₁₆	2L774	7⅞	2L891	2L858	6¾	2L876	7⅞	2L767	8¾	2L894	2L862
						5⅞	2L870	5⅞	2L881	6⅞	2L775	7⅞	2L890	2L735	6 ⁷ / ₁₆	2L875	6⅞	2L766			
						4 ¹¹ / ₁₆	2L869	4 ¹³ / ₁₆	2L880	6⅞	2L776				6⅞	2L873	6⅞	2L764			
						4⅝	2L868	4⅞	2L759	5⅞	2L777										
				4 ³ / ₁₆	2L867																
103	Wear ring, casing		4L465		4L466		4L467		4L468		4L465		4L466		4L467		4L465		1		
184	Seal housing with ring		1L465				1L469		1L472		1L466				1L470		1L467		3		
203	Wear ring, seal housing		See item 100						4L464		See item 100										
126	Shaft sleeve	316SS	4L473	4L456						4L473		4L456				4L473		4L456			
178	Key, impeller	Steel		4K11						4K555		4K11				4K555		4K11		1	
422	Stud, impeller		13K217																		
199	Washer, impeller	316SS	4L458																		
108	Motor adapter, 143-184JM and S-group brg. frame	Cast iron ASTM A48	1L554	1L50				1L99		1L560		1L52		1L99		1L562		1L97		25	
	Motor adapter, 213-256JM	cl. 20	1L555	1L51				1L98		1L561		1L53		1L98		1L563		1L96		29	
370	Bolt, casing	300SS	13L38 (8 req.)						13L89		13L38 (8 req.)				13L89 (8 req.)				-		
371 or 370B	Bolt, adapter, 143-184JM and S-Group brg. frame	Steel SAE 1200	13K360	13L43				13L43		13K360		13L43		13L43		13K360		13L43		25	
	Bolt, adapter, 213-256JM		13K379	13L41				13K245		13K361		13L40		13K245		13K361		13L40		29	
383	Mech. seal – standard	Type 21	10K27 – carbon/silicon-carbide/viton																1		
	Mech. seal – high temp.		10K19 – Carbon/silicon-carbide/EPR																		
	Mech. seal – severe duty		10K64 – Silicon-carbide/silicon-carbide/viton																		
383A	Retainer, seal spring	316SS	4K517																		
408	Plug, vent and drain	316SS	6L60																2		
412A	O-ring, impeller washer	Viton	5K320 standard (5K195 EPR option)																1		
412F	O-ring, shaft sleeve	Viton	5K307 standard (5K306 EPR option)																		
513	O-ring, casing – standard	Viton	5K407				5L70		5K408				5L70		5L71						
	O-ring, casing – optional	EPR	5K393				5K317		5K394				5K317		5L110						

① 9SH, 10SH and the 11SH units were obsoleted in January 2003 and replaced by the 9ASH, 10ASH and 11ASH units.

② New numbering system on September of 2006 dropped the "A". There was no mechanical change.

Order Online: www.PumpCatalog.com

SSH M-GROUP (254JM-365TCZ)

Item No.	Part Description	Material	1½ x 2½-10 24SH		2 x 2½-10 25SH		2½ x 3-8 22SH		2½ x 3-10 27SH		3 x 4-8 23SH		3 x 4-10 28SH		Max. Wt. (lbs.)	
100	Casing, with wear ring	AISI Type 316L SS	1L455		1L458		1L460		1L461		1L463		1L464		17	
101	Impeller		9⅞	2L778	9⅞	2L790	9⅞	2L808	10⅞	2L804	9⅞	2L825	10⅞	2L836	8	
			9½	2L779	9½	2L791	8¾	2L809	9¹⁵⁄₁₆	2L805	8¹¹⁄₁₆	2L826	10¼	2L837		
			9⅞	2L780	9⅞	2L792	8½	2L810	9⅞	2L806	8⅞	2L827	9¹³⁄₁₆	2L838		
			8⅞	2L781	8¹³⁄₁₆	2L793	8¼	2L811	9¼	2L807	8⅞	2L828	9⅞	2L839		
			8⅞	2L782	8⅞	2L794	7⅞	2L812	8¼	2L809	7¹¹⁄₁₆	2L829	9⅞	2L825		
			8¼	2L783	7¹⁵⁄₁₆	2L795	7½	2L813			7½	2L830	8¹¹⁄₁₆	2L826		
					7¹¹⁄₁₆	2L796	7⅞	2L814			7⅞	2L831				
							6¹¹⁄₁₆	2L815			6⅞	2L832				
							6½	2L816			6½	2L833				
											6	2L834				
											5½	2L835				
103	Wear ring, casing			4L467				4L468			4L469				1	
184	Seal housing, with ring			1L468				1L473		1L475		1L475		1L478		3
203	Wear ring, seal housing			4L201				4L464								1
126	Shaft sleeve	316 SS	4L457													
178	Key, impeller	Steel	4K261													
422	Stud, impeller		13K301													
199	Washer, impeller	316 SS	4L463													
108	Motor adapter, 254-256JM and M-Group bearing frame	Cast iron ASTM	1L91				1L89		1L93				1L94		31	
	Motor adapter, 280JM-365TCZ	A48 cl. 20	1L90				1L88		1L92				1L95		44	
370	Bolt, casing	300 SS	13L86 (6 req'd)				13L89 (8 req'd)		13L86 (8 req'd)				13K45 (8 req'd)		–	
371 or 370B	Bolt, adapter, 254-256JM and S-Group bearing frame	Steel SAE 1200	13L88						13L116						–	
	Bolt, adapter, 280JM-365TCZ		13L87						13L115						–	
383	Mech. seal – standard	Type 21	10K45 – carbon/silicon-carbide/viton												1	
	Mech. seal – high temp.		10K20 – Carbon/silicon-carbide/EPR													
	Mech. seal – severe duty		10K65 – Silicon-carbide/silicon-carbide/viton													
383A	Retainer, seal spring	316SS	4K500												2	
408	Plug, vent and drain	316SS	6L60													
412A	O-ring, impeller washer	Viton	5K309 standard (5K308 EPR option)													1
412F	O-ring, shaft sleeve	Viton	5K309 standard (5K308 EPR option)													
513	O-ring, casing – standard	Viton	5L71				5L70		5L71				5L72			
	O-ring, casing – optional	EPR	5L110				5K317		5L110				5L116			

Order Online: www.PumpCatalog.com

SSH M-GROUP (140JM, 180JM & 210JM)

Item No.	Part Description	Material	1½ x 2½-10 24SH		2 x 2½-10 25SH		2½ x 3-8 22SH		2½ x 3-10 27SH		3 x 4-8 23SH		Max. Wt. (lbs.)
100	Casing, with wear ring	AISI Type 316L SS	1L455		1L458		1L460		1L461		1L463		17
101	Impeller		9 ⁷ / ₈	2L784	9 ⁷ / ₈	2L797	9 ¹ / ₈	2L820	9 ¹⁵ / ₁₆	2L817	9 ⁷ / ₈	2L840	8
			9½	2L785	9½	2L798	8½	2L822	9 ⁹ / ₁₆	2L818	8 ⁷ / ₁₆	2L841	
			9 ⁹ / ₁₆	2L786	9 ⁹ / ₁₆	2L799	8¼	2L823	9¼	2L819	8 ¹ / ₁₆	2L842	
			8 ⁷ / ₈	2L787	8 ³ / ₁₆	2L800	7 ⁷ / ₈	2L824	8¾	2L821	7½	2L843	
			8 ¹ / ₁₆	2L788	8 ³ / ₁₆	2L801	7 ⁷ / ₈	2L772			7 ⁷ / ₈	2L844	
			8¼	2L789	7 ¹⁵ / ₁₆	2L802	6 ¹ / ₁₆	2L774			6½	2L845	
					7 ¹ / ₁₆	2L803					6	2L846	
											5½	2L847	
103	Wear ring, casing			4L467				4L468			4L469		1
184	Seal housing, with ring		1L467				1L472		1L474		1L476		3
203	Wear ring, seal housing		4L201				4L464						1
126	Shaft sleeve	316SS	4K501				4L456						
178	Key, impeller	Steel	4K11										
422	Stud, impeller		13K217										
199	Washer, impeller	316 SS	4L458										
108	Motor adapter, 143-184JM and S-group bearing frame	Cast iron ASTM	1L97				1L99		N/A		1L123		25
	Motor adapter, 213-256JM	A48 cl.20	1L96				1L98		1L100				29
370	Bolt, casing	300 SS	13L86 (8 req'd)				13L89 (8 req'd)		13L86 (8 req'd)				-
371 or 370B	Bolt, adapter, 143-184JM and S-group bearing frame	Steel SAE 1200	13L43						N/A		13L117		-
	Bolt, adapter, 213-256JM		13K245								13K44		-
383	Mechanical seal - standard	Type 21	10K27 - carbon/silicon-carbide/viton										1
	Mechanical seal - high temp.		10K19 - Carbon/silicon-carbide/EPR										
	Mechanical seal - severe duty		10K64 - Silicon-carbide/silicon-carbide/viton										
383A	Retainer, seal spring	316 SS	4K517										
408	Plug, vent and drain	316 SS	6L60										2
412A	O-ring, impeller washer	Viton	5K320 standard (5K195 EPR option)										1
412F	O-ring, shaft sleeve	Viton	5K320 standard (5K195 EPR)				5K307 standard (5K306 EPR option)						
513	O-ring, casing - standard	Viton	5L71				5L70		5L71				
	O-ring, casing - optional	EPR	5L110				5K317		5L110				

Order Online: www.PumpCatalog.com

Xylem Inc.

2881 East Bayard Street Ext., Suite A, Seneca Falls, NY 13148

Phone: (800) 453-6777 Fax: (888) 322-5877

www.gouldswatertechnology.com



Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.

© 2017 Xylem Inc. RSSHSMGR R4 October 2017