

 INDUSTRIAL FLOW SOLUTIONS™	TECHNICAL DATA			BJM Pumps® KB75HF		
	Dwg:	DS-C11-002	Rev:	3	Date:	8/15/2025

GENERAL DATA

MAX. FLOW:	339 GPM (1283.2 L/min)
MAX. HEAD:	140' (42.6m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	HIGH TEMP. DEWATERING/MILD SLURRY TOP DISCHARGE
MINIMUM SUBMERSION DEPTH: FOR CONT. DUTY ³	28.8" (730 mm)
PUMP DOWN WATER LEVEL:	7.52" (191 mm)
SOLID SIZE:	0.4" (10 mm)
IMPELLER DIAMETER:	6.5" (165 mm)
DISCHARGE SIZE	4" NPT-MALE
PUMP WEIGHT (without cable):	276 lbs (125 kg)
SHIPPING WEIGHT:	357 lbs (162 kg)

CONSTRUCTION / MATERIAL DATA

UPPER MECHANICAL SEAL	CARBON/CERAMIC, FKM
LOWER MECHANICAL SEAL	SILICON CARBIDE/ SILICONE CARBIDE, FKM
MOTOR HOUSING	CAST IRON
PUMP VOLUTE	DUCTILE IRON
WEAR PLATE	HI-CHROME
AGITATOR	HI-CHROME
IMPELLER	HI-CHROME
STAND	STEEL
LIP SEAL & O-RINGS	FKM
ROTOR SHAFT	304 SS
EXTERNAL HARDWARE	304 SS
BALL BEARING: OIL LUBRICATED UPPER	6306
BALL BEARING: OIL LUBRICATED LOWER	6308

ELECTRICAL / MOTOR DATA

MOTOR: HP, TYPE, RATING	10, SUBMERSIBLE OIL FILLED, (CONT. DUTY ³)	
MOTOR RPM	3450	
MOTOR INSULATION CLASS	R, 428°F (220°C)	
MOTOR SERVICE FACTOR	1.1	
VOLTAGE - 60Hz ¹	460V	575V
CURRENT F.L.A.	13.6	10.5
LOCKED ROTOR CURRENT (LRA)	107	86
POWER CABLE: GAGE-LENGTH	AWG 10/4, 50' (15m) HIGH TEMP RATED CABLE	
SENSOR CABLE: ² GAGE-LENGTH	AWG 18/4, 50' (15m) HIGH TEMP RATED CABLE	
MOTOR PROTECTION	THERMAL SENSOR SWITCHES EMBEDDED IN EACH WINDING PHASE, 300°F (149°C)	
SEAL LEAK DETECTOR ²	Seal Minder® MOISTURE SENSING PROBE	
MAXIMUM LIQUID TEMPERATURE	200°F (93°C)	

1 - Available in other voltages for 50Hz

2 - Requires a thermal and seal fail circuit in control panel for warranty validity

3 - Continuous duty motor - see minimum submersion depth above

©2025 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA

(860) 631-3618 • www.flowsolutions.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® KB75HF

Dwg:




DS-C11-001

Rev:

1

Date:

11/6/2023

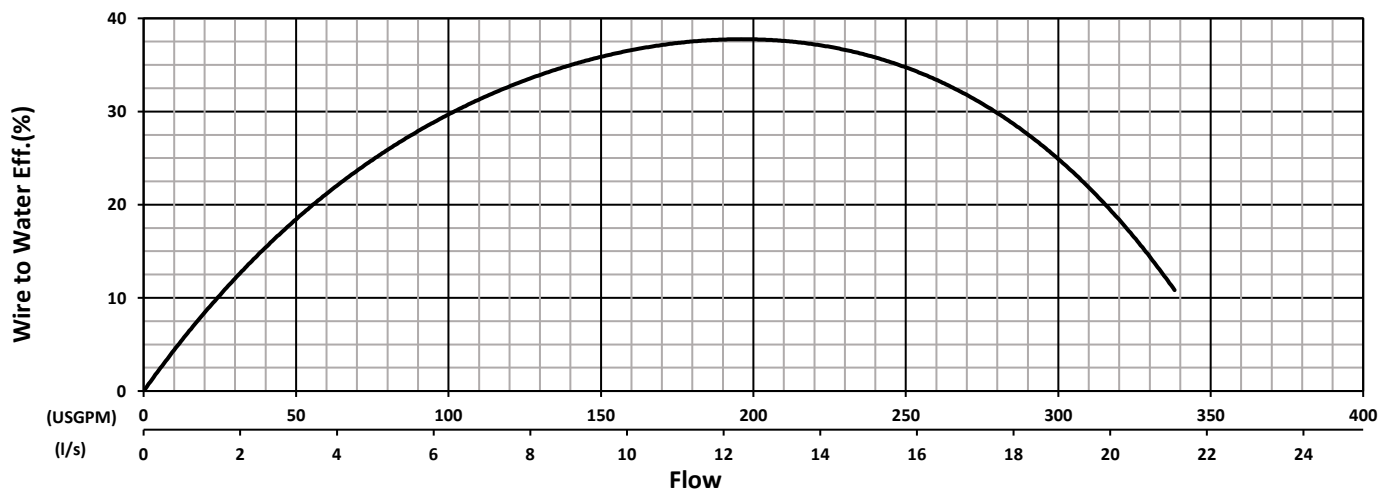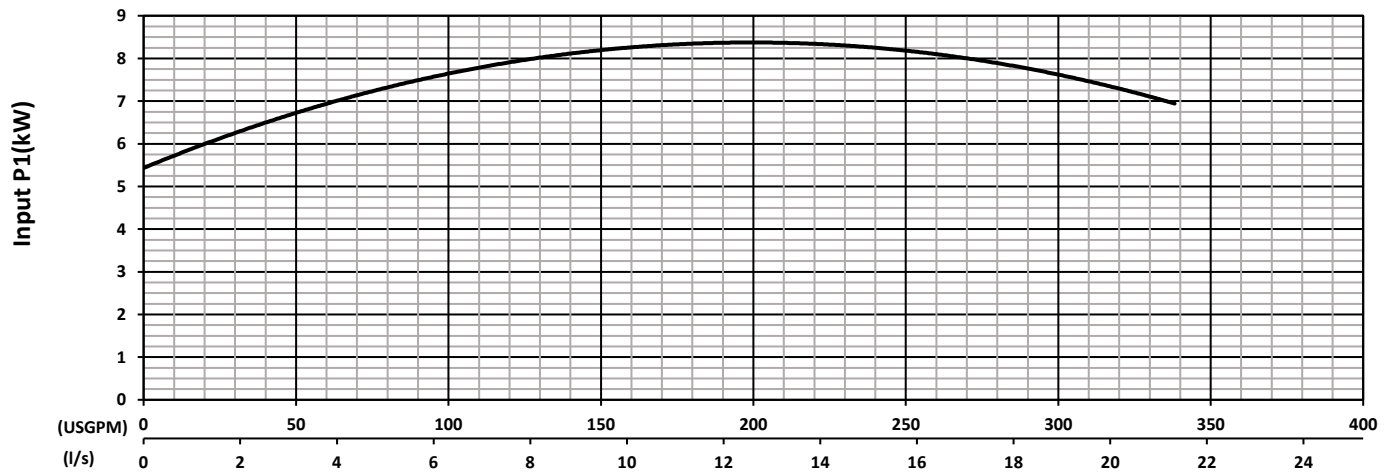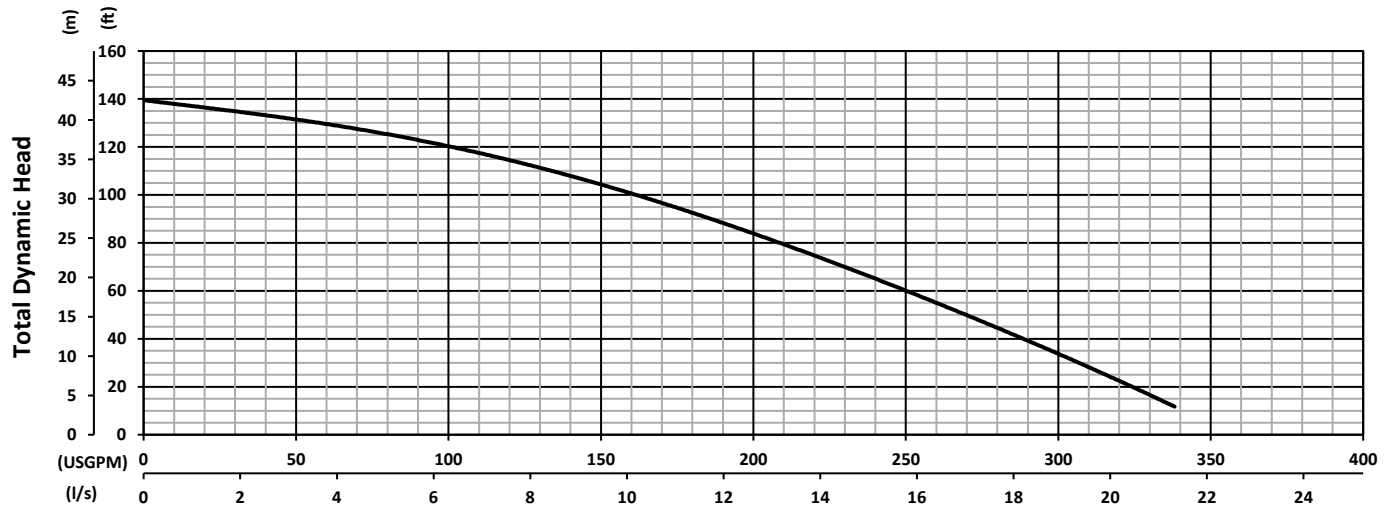

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

75HF - Dual Units

Frequency 60 Hz
Pump Speed 3450 RPM
Impeller 165mm

Specifications subject to change without notice