

 INDUSTRIAL FLOW SOLUTIONS™	TECHNICAL DATA			BJM Pumps® XP-KZN75		
	Dwg:	DS-C37-006	Rev:	1	Date:	8/20/2025

GENERAL DATA

APPROVALS:	EXPLOSION PROOF FM APPROVED CLASS1, DIVISION 1, GROUP C & D	
MAX. FLOW:	625 GPM (2365.8 L/min)	
MAX. HEAD:	68' (20.7m)	
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths	
PUMP TYPE	SLURRY HANDLING TOP DISCHARGE	
MINIMUM SUBMERSION DEPTH: FOR CONT. DUTY ³	33" (821 mm)	
PUMP DOWN WATER LEVEL:	12" (305 mm)	
SOLID SIZE:	1" (25.4 mm)	
STRAINER OPENING:	1.38" (34.9 mm)	
IMPELLER DIAMETER:	8.98" (228 mm)	
DISCHARGE SIZE	4" NPT-MALE	
PUMP WEIGHT (without cable):	362 lbs (164 kg)	
SHIPPING WEIGHT:	434 lbs (197 kg)	

CONSTRUCTION / MATERIAL DATA

DUAL MECHANICAL SEAL	SILICON CARBIDE/ SILICONE CARBIDE, FKM
MOTOR HOUSING	CAST IRON
PUMP VOLUTE	DUCTILE IRON ¹
WEAR PLATE, AGITATOR, & IMPELLER	HI-CHROME
STRAINER/STAND	STEEL
LIP SEAL & O-RINGS	BUNA-N
ROTOR SHAFT	410 SS
EXTERNAL HARDWARE	304 SS
BALL BEARING: PERM. LUBE. UPPER	6306
BALL BEARING: PERM. LUBE. LOWER	6308

ELECTRICAL / MOTOR DATA

MOTOR: HP, TYPE, RATING	10, SUBMERSIBLE , (CONTINUOUS DUTY ³)	
MOTOR RPM	1750	
MOTOR INSULATION CLASS	H	
MOTOR SERVICE FACTOR	1.15	
VOLTAGE - 60Hz	460V	575V
CURRENT F.L.A.	13	10.5
LOCKED ROTOR CURRENT (LRA)	77	55
POWER CABLE: GAUGE-LENGTH	AWG 10/5, 50' (15m) SOOW	
SENSOR CABLE ² : GAUGE-LENGTH	AWG 16/4, 50' (15m) SOOW	
MOTOR PROTECTION	THERMAL SENSOR SWITCHES EMBEDDED IN EACH WINDING PHASE, 302°F (150°C)	
SEAL LEAK DETECTOR ²	Seal Minder® MOISTURE SENSING PROBE	
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)	

1 - Optional WC/Cr/Co abrasion resistant internal coating(type 'R') available.

2 - Requires a seal fail and thermal sensor circuit in control panel for warranty validity

3 - Continuous duty motor - see minimum submersion depth above

©2025 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA

(860) 631-3618 • www.flowsolutions.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® XP-KZN75

Dwg:




DS-C37-003

Rev:

1

Date:

6/12/2025

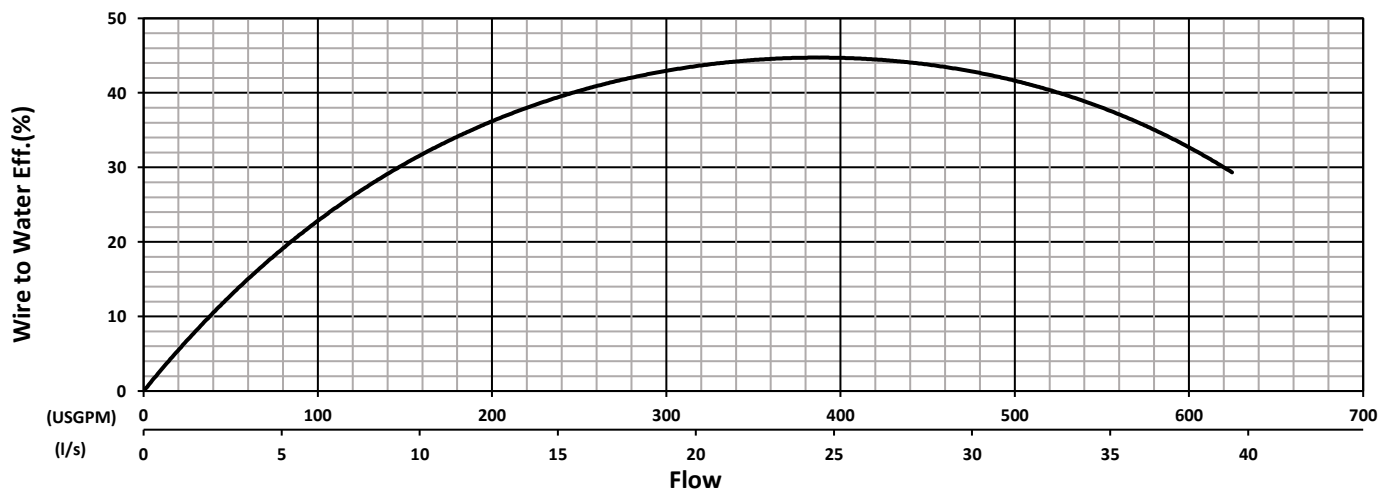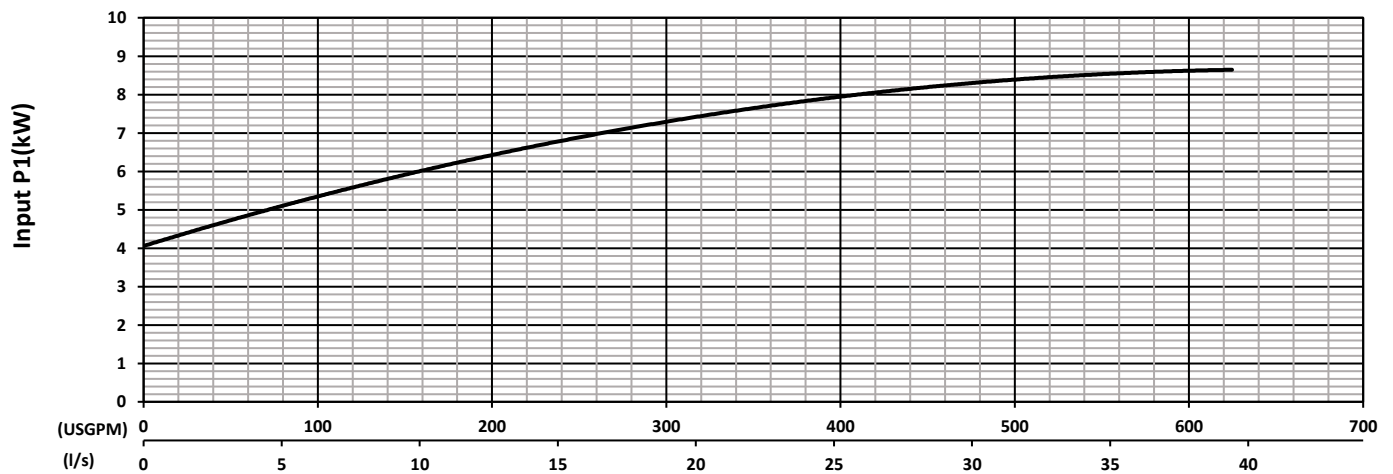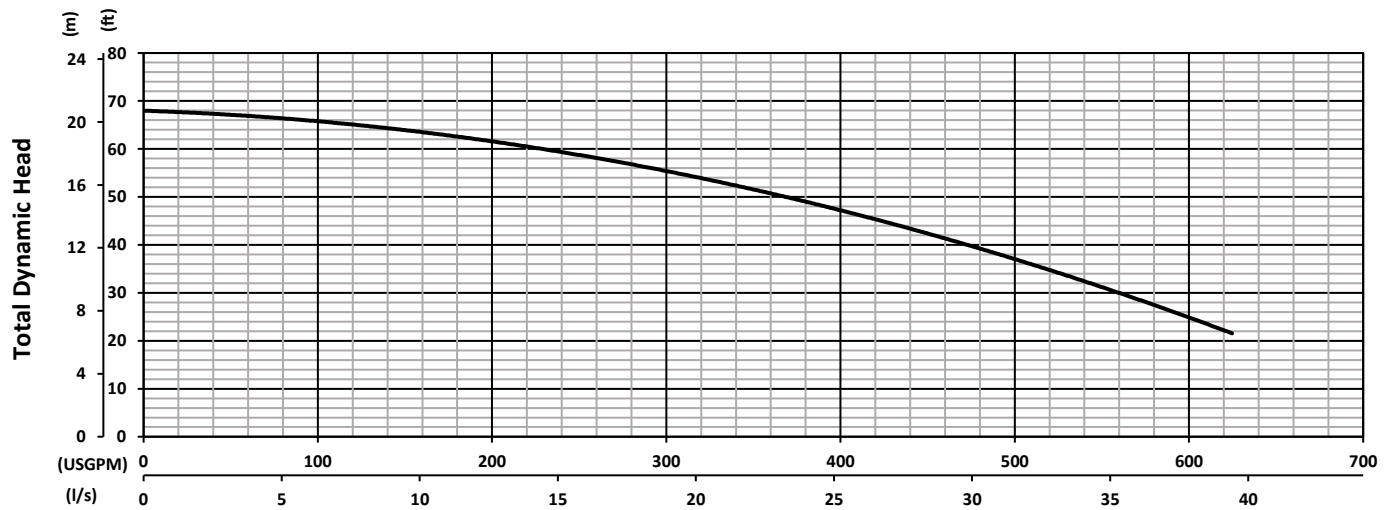

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

75 - Dual Units

Frequency
Pump Speed
Impeller

60 Hz
1750 RPM
228mm

Specifications subject to change without notice