

SE2UL E950

2" 'S' SERIES

SELF-PRIMING PUMP


BULLETIN
PP-637D
Aug. 2020

PACER

PACER

Features:

- Corrosion resistant glass reinforced polyester.
- EPDM elastomers are standard.
- Stainless steel fasteners
- Maximum flow to 195 U.S. GPM.
- Maximum TDH to 120 feet.
- Suction lift to 25 feet.
- 2" NPT ports standard.
- Double flush volute with built-in check valve.
- Lightweight and portable with molded carry handle.

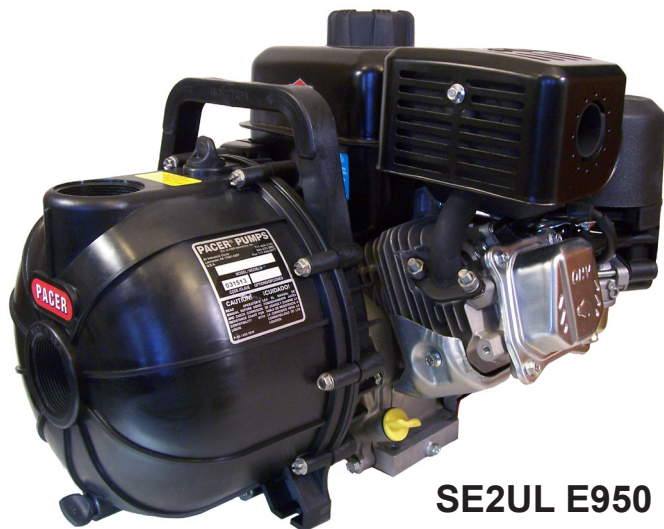


SE2UL E950



XR Professional Engine Features:

- Briggs & Stratton 208cc, 6.5 hp engine.
- 2 year warranty on engine through manufacturer.
- Compact overhead valve design.
- Dual ball bearings.
- Cast iron cylinder sleeve.
- Forged Crankshaft
- Fuel shut-off valve

PERFORMANCE CURVE

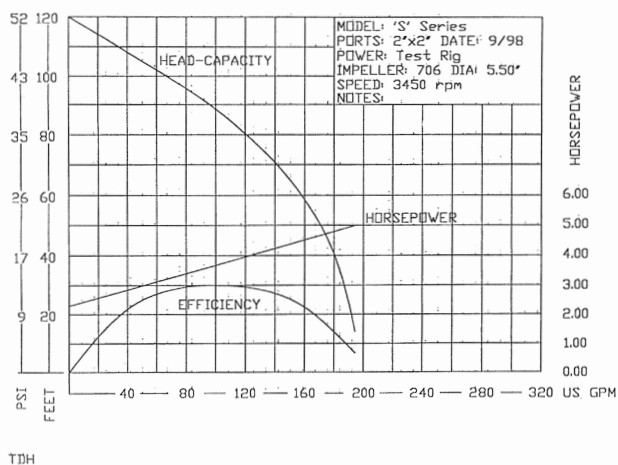

CURVE	MODEL	PORT SIZE	MAX. FLOW	MAX. TDH	ENGINE	WEIGHT
U	SE2UL E950	2"	195 GPM	120 ft.	Briggs & Stratton 950 XR Pro Series	50 lbs

PACER

Division of ASM Industries, Inc.

41 Industrial Circle
Lancaster PA 17601

email: sales@pacerpumps.com

www.pacerpumps.com

Phone: 717-925-8240

Toll Free: 800-233-3861

FAX: 717-925-8242

