

BALDOR® • RELIANCE

Product Information Packet

GM3345

.2/.25HP,1400RPM,3PH,50/60HZ,K-1,2524M

Part Detail							
Revision:	AE	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	2524M	Elec. Spec:	25WGW200	CD Diagram:	CD0005A05
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:		Layout:	25E265W200G4
Frame:	K	Mounting:		Poles:	04	Created Date:	
Base:		Rotation:	R	Insulation:	F	Eff. Date:	08-26-2016
Leads:	9#18					Replaced By:	
Literature:		Elec. Diagram:					


Nameplate NP1220A05


CAT.NO.	GM3345		
SER.NO.			
SPEC.	25E265W200G4		
HP	.2//.25	TE	
VOLTS	190/380//208-230/460		
AMP	1.08/.54//1-1.10/.55		
HZ	50//60	PH	3
AMB.	40	DUTY	CONT
CAP		CODE	-
SER.F.	1.00	CLASS	F
SF AMP			
R.P.M.	70//85		
TORQ/IN LB	112		
RATIO	20:1		
APRV-CE		APRV-CSA	
		APRV-UL	

Parts List		
Part Number	Description	Quantity
SA060678	SA 25E265W200G4	1.000 EA
RA055012	RA 25E265W200G4	1.000 EA
SR000448	SR 25E265W200G4	1.000 EA
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 EA
HA3170A06	THRUBOLT, FLAT HD. #8-32 6.125 LONG	2.000 EA
25EP3100A08G	EP,25AC DE CL 60R8 RA 2.375 BC	1.000 EA
HW5109A08	WASHER, WAVE SPRING FOR 30MM BORE SMALLE	1.000 EA
HW5002A44	N5002-112 RET RING INTERNBEVELED F/6001	1.000 EA
HW4600G69	SEAL .500 X 1.125 X .25, SGL LIP FT802	1.000 EA
25EP2101A18G	EP,25AC ODE CL NONE 0.500 SHAFT EXIT	1.000 EA
51XT0832G05	SCREW,HEX HD 8-32 X 5/16 GRN.	1.000 EA
25FH4003G	FAN COVER, 25F PAINTED	1.000 EA
BFN3712	FAN,PM MOTOR STYLE R	1.000 EA
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	4.000 EA
HG0048A01G	HSG,K EX	1.000 EA
BS0141A01G	HSG,K CAP W/FOOT OPEN SNAP RING 2X .2	1.000 EA
BS0141A02G	HSG,K CAP W/FOOT CLOSED NO SNAP RING	1.000 EA
HA4021A05	1/16 NPSF-HX SOC PIPE PLUG TAPER DRY SEA	1.000 EA
BG6203A01	6203 OPEN,C3,SLUSH	1.000 EA
HW5002A51	RET RING N5002 - 156 (WALDES) BEVELED 40	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
60XM0832A10	SCREW, PAN TORX 8-32X.625 THREAD FORMING	8.000 EA
HW4600G59	SEAL,.625" X .875" VITON VT802	1.000 EA
BG6203A01	6203 OPEN,C3,SLUSH	1.000 EA




Parts List (continued)		
Part Number	Description	Quantity
RM1056	RUBBER SQUARE RING 2.739 I.D.	2.000 EA
HA1194B01	BLADDER,CJK EXPANSION	1.000 EA
15XM0632A06	SCREW, 6-32X .375, THREAD FORMING	3.000 EA
RM1057	RUBBER SQUARE RING 1.424 I.D.	1.000 EA
19XN1032A12	SCREW, HEX WASHER HEAD, #10-32 X .750	2.000 EA
19XN1032A09	SCREW, HEX WASHER HEAD, #10-32 X .563 W/	2.000 EA
BMH1910	KEY 3/16X3/16X1 1/8 AUTO X	1.000 EA
HA2250	SPACER, FOR "K" BOX WORM GEAR AUTOMATED	1.000 EA
24CB3000A	CONDUIT BOX - MODEL 24	1.000 EA
24CB3500A	CONDUIT BOX LID W/BALDOR LOGO	1.000 EA
XY0632A05	NUT, #6-32 SELF LOCKING	2.000 EA
XY0632A04	NUT, #6-32 ACORN, HIGH CROWN	1.000 EA
15XP0619A08	#6-19X1/2 PAN HD PHILLIPS PLASTITE 48-2	4.000 EA
MJ5019A01	ADHESIVE LOCTITE #680 WAS BAD4525	0.010 EA
WM0054A02	WORM,K 20.0 INP	1.000 EA
MJ1000B02	KLUB. GH6-460 GEAR OIL 1 GALLON	0.024 GA
NP1220A05	NP,AC STD AD NONE V CE CSA UL GEAR MOTOR	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 11/14	1.000 EA
LB1451	WARNING LABEL, CE WARNING SYMBOLS ONLY	1.000 EA
CPA1000	PACKING GROUP STD. SINGLE	1.000 EA
MG2000A14	RUST VETO 342 RUST INHIBITOR	0.001 GA
ME4000	.375-.75" DIA.#SW-04 WOVEN SHAFT PROTECT	0.166 FT

No performance data has been
assigned to this product.

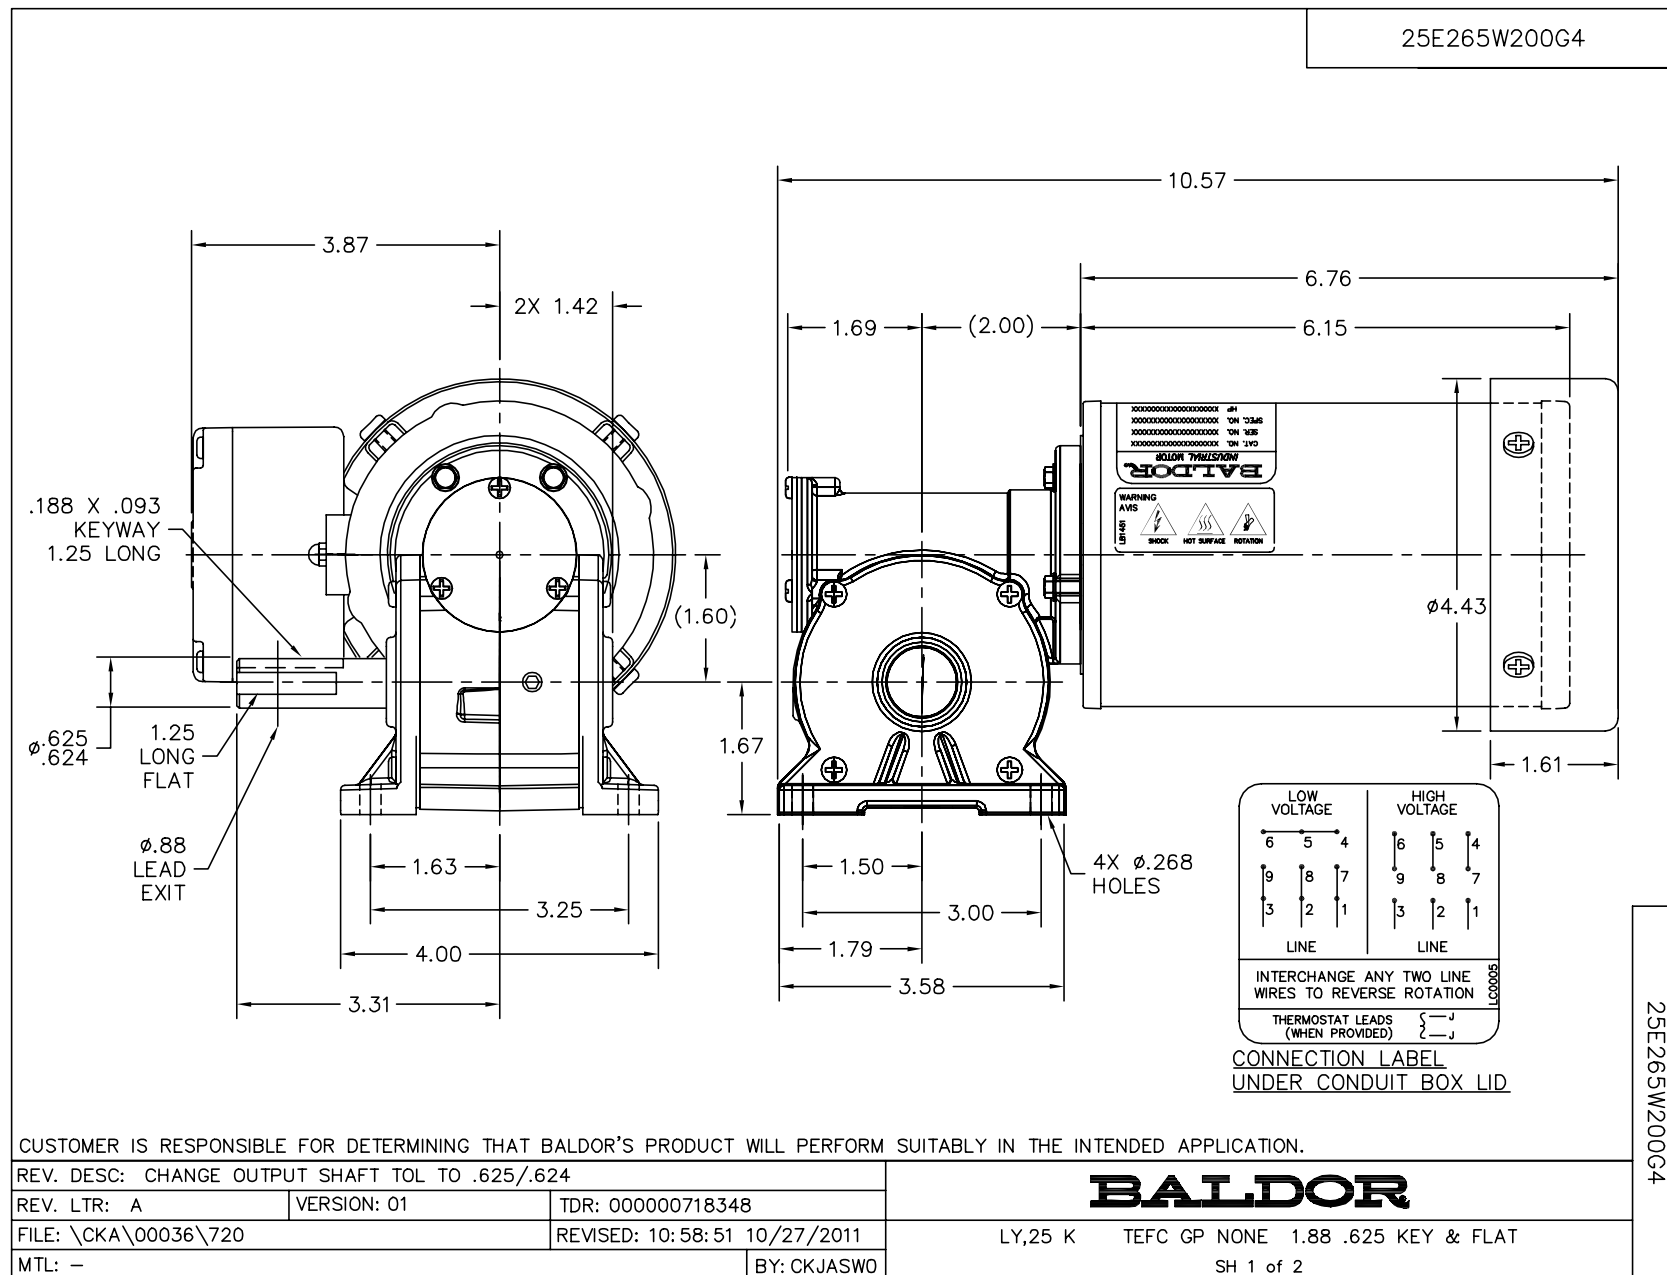

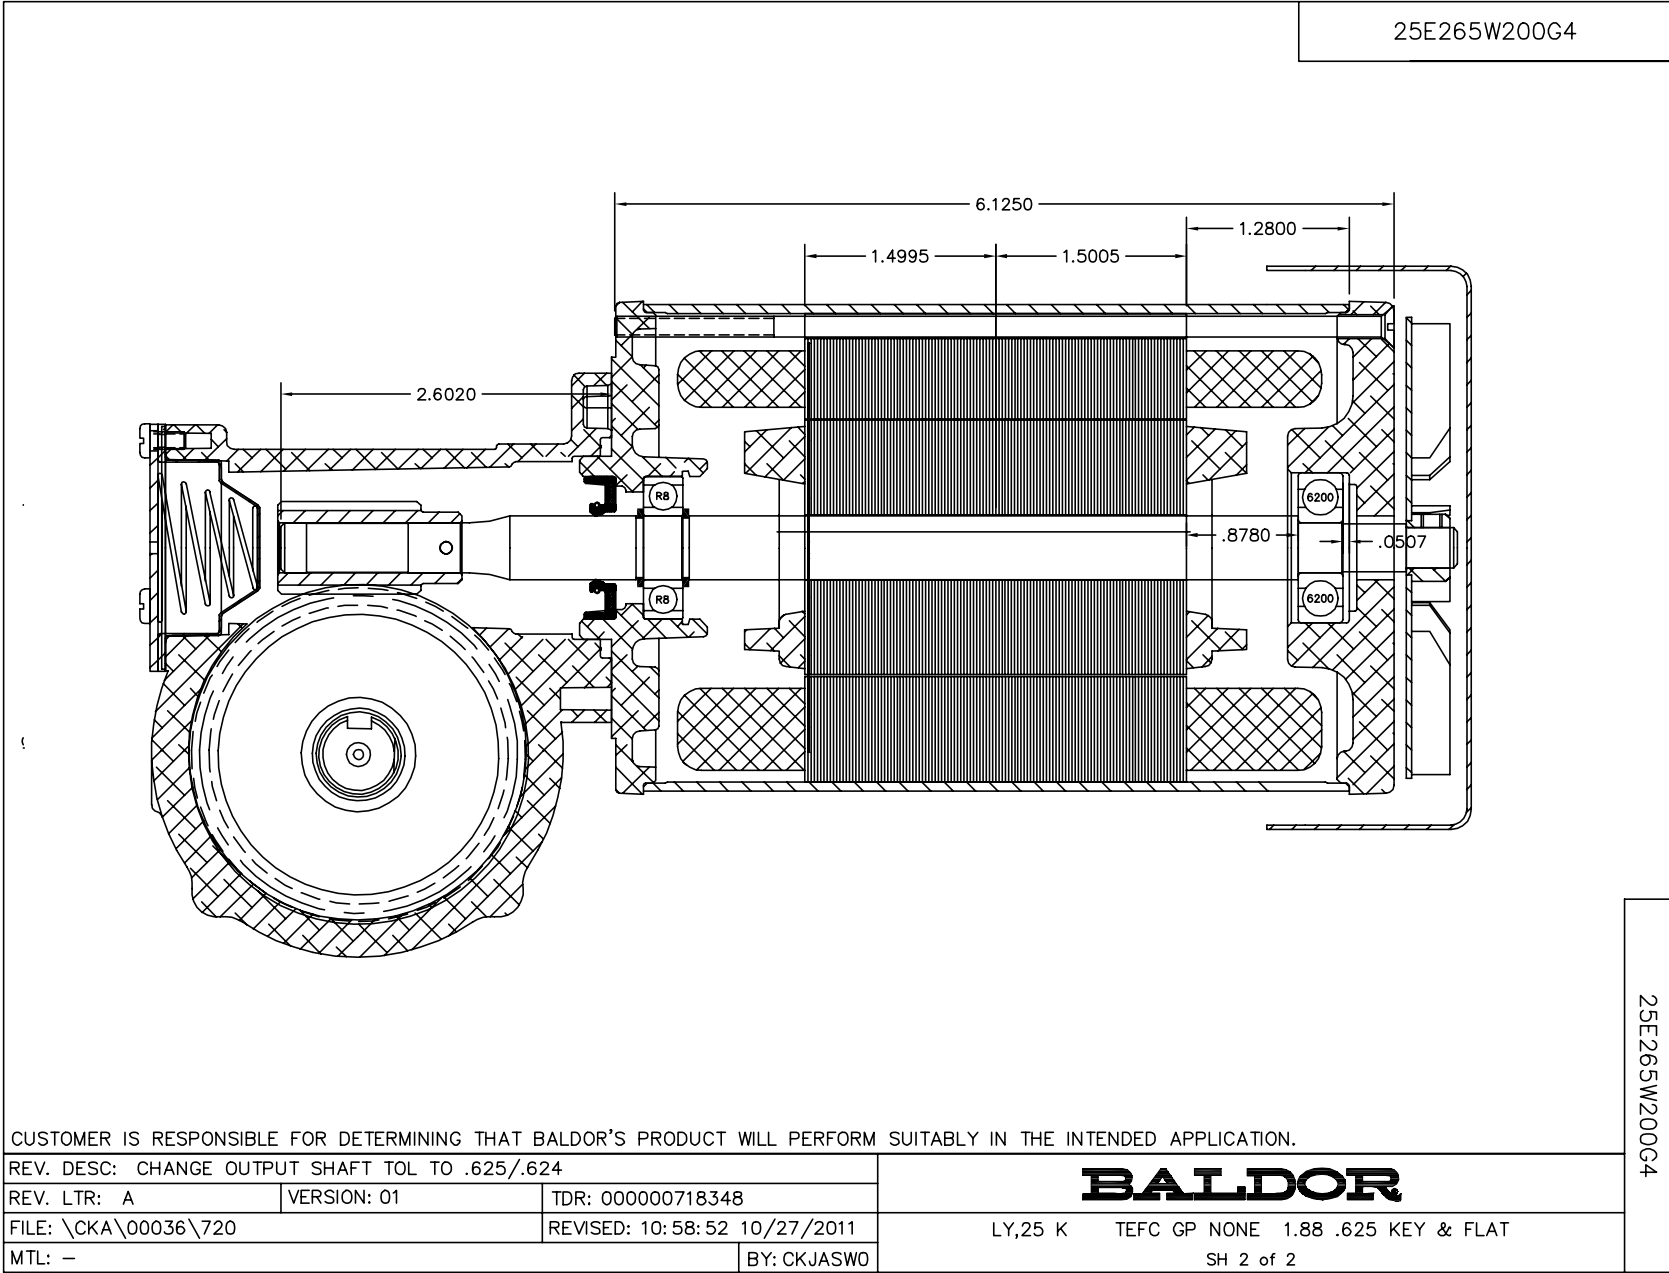

CD0005A05

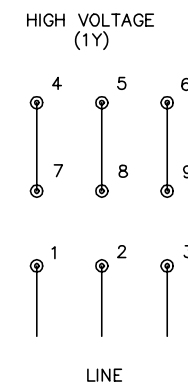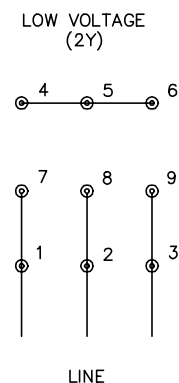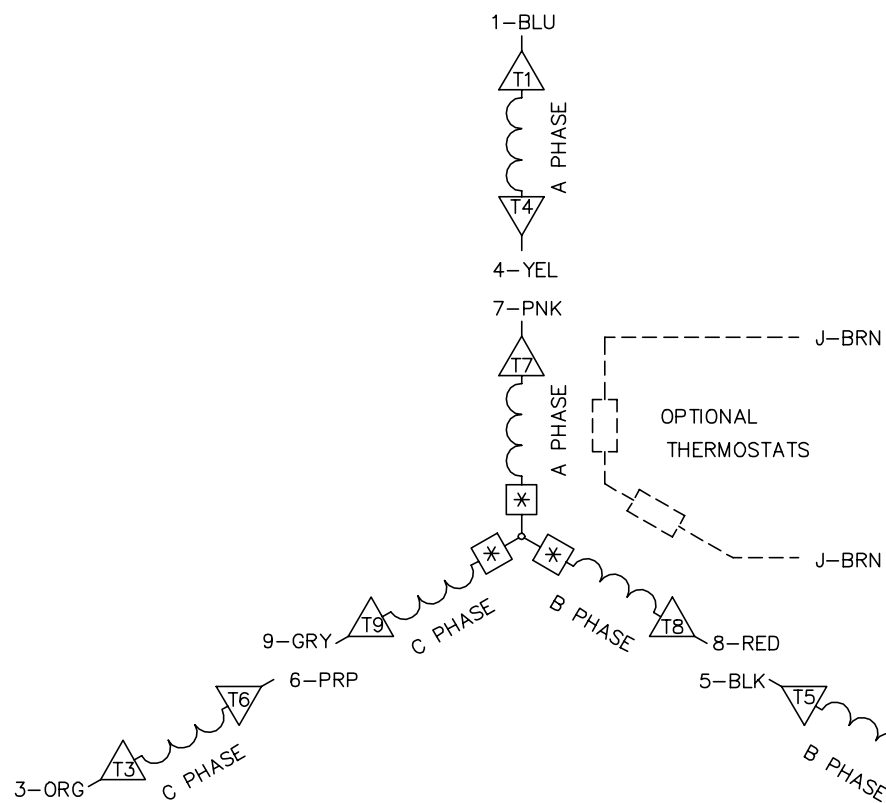

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.
5. =MAGNET WIRE COIL END WITH I.D. NUMBER.
6. =MAGNET WIRE COIL END WITH I.D. SYMBOL.
7. SEE CW PRINT FOR NEST TO NEST CROSSOVER CONNECTIONS.

REV. DESC: ADD NEST NOTE

REV. LTR: C

VERSION: 03

TDR: 000000445597

CD0005A05

FILE: \CKA\00024\847

REVISED: 12:51:06 11/15/2007

MTL: -

BY: CKMICRO

BALDOR • DODGE • RELIANCE

3PH, DV, 9 LEADS, CK

CD0005A05