

BALDOR® • RELIANCE

Product Information Packet

GMP3332

.33HP,1725RPM,3PH,60HZ,PSLH,3320M,

Part Detail							
Revision:	H	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3320M	Elec. Spec:	33WG0675	CD Diagram:	CD0005A05
Enclosure:		Mfg Plant:		Mech. Spec:		Layout:	33E873-0675G1
Frame:	PSLH	Mounting:		Poles:	04	Created Date:	07-15-2014
Base:		Rotation:	R	Insulation:	B	Eff. Date:	11-16-2016
Leads:	9#18					Replaced By:	
Literature:		Elec. Diagram:					


Nameplate NP1220A07									
CAT.NO.		GMP3332							
SER.NO									
SPEC.		33E873-0675G1							
HP		.33							
VOLTS		208-230/460							
AMP		1.5-1.4/.7							
HZ		60				PH		3	
AMB.		40				DUTY		CONT	
CAP						CODE		-	
SER.F.		1.00				CLASS		B	
R.P.M.		86							
TORQ/IN LB		218							
RATIO		20:1							
APRV-CSA						APRV-UL			


Parts List		
Part Number	Description	Quantity
SA309556	SA 33E873-0675G1	1.000 EA
RA296913	RA 33E873-0675G1	1.000 EA
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 EA
HG0077A12F	HSG,PSL EP 33AC SHORT HOUSING	1.000 EA
BMH1714	WASHER,PREC 1.259"X.756"X.010"	2.000 EA
HW5002A95	N5002-125 32MM BEVELED INTERNAL RET RING	1.000 EA
HW4600F102	SEAL, 0.563 X 0.875 X 0.188 SNGL LIP	1.000 EA
HA4021A05	1/16 NPSF-HX SOC PIPE PLUG TAPER DRY SEA	1.000 EA
HW3064E05	1/8 X 1/2 PIN DRIVE LOK TYPE H	1.000 EA
34CB3002C	CB CAST W/.69 DIA HOLE	1.000 EA
34GS1029A01	GASKET, CONDUIT BOX	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32X3/8 HX WSHR HD,SLTDTYPE 23,GREEN	1.000 EA
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 EA
34GS1031A01	GASKET, FLAT CONDUIT BOX LID (LEXIDE)	1.000 EA
51XT0832A08	8-32 X 1/2 TY23 HXWS SLDSR	4.000 EA
33EP3100A01SP	EP,33AC ODE GP 6203 TEFC W/DRAIN	1.000 EA
HW5109A05	WASHER, WAVE SPRING FOR 40MM BORE SMALLE	1.000 EA
HA3100A83	THRUBOLT 10-32 X 7.250"	2.000 EA
33FN3000SP	EXTERNAL FAN, PLASTIC	1.000 EA
HW1003A08	WASHER, #8 EX TH LK, ZN (F/S)	1.000 EA
33FH4000A01SP	FAN COVER, STAMPED	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
SG0045B97	SHAFT,ASSY PSLH SHORT INT1 2RED 5.0/4.0	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
SG0045B98	SHAFT,ASSY PSL SHORT OUT 2RED 0.0/5.0	1.000 EA
CG0012A01FG	CAP, PSL GEAR HEAD	1.000 EA
RM1020A22	O-RING .070 X 4.527	1.000 EA
HW4600G71	SEAL, .750 X 1.250 X .250 SGL LIP FT802	1.000 EA
BH1163A03	SCE1212 INA NEEDLE ROLLER BBG1027	1.000 EA
60XM2520A12	SCREW,PAN TORX 1/4-20X.750 THREAD FORMIN	4.000 EA
BMH1910	KEY 3/16X3/16X1 1/8 AUTO X	1.000 EA
ME4000	.375-.75" DIA.#SW-04 WOVEN SHAFT PROTECT	0.167 FT
MJ1000B02	KLUB. GH6-460 GEAR OIL 1 GALLON	0.112 GA
MG1000G27	S-9282E MED CHARCOAL METALLIC GREY	0.030 GA
HA4067A01	PUSH IN DRAIN FITTING (BLACK)	2.000 EA
NP1220A07	NP,AC STD AD NONE V CSA UL GEAR MOTOR	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 11/14	1.000 EA
LB1119N	WARNING LABEL	1.000 EA
CPA1001	PACKING GROUP OVERSIZED SINGLE	1.000 EA


Accessories		
Part Number	Description	Multiplier
LB75	BASE, L BRACKET 34 FRAME PSL KIT BLACK	A8

No performance data has been
assigned to this product.

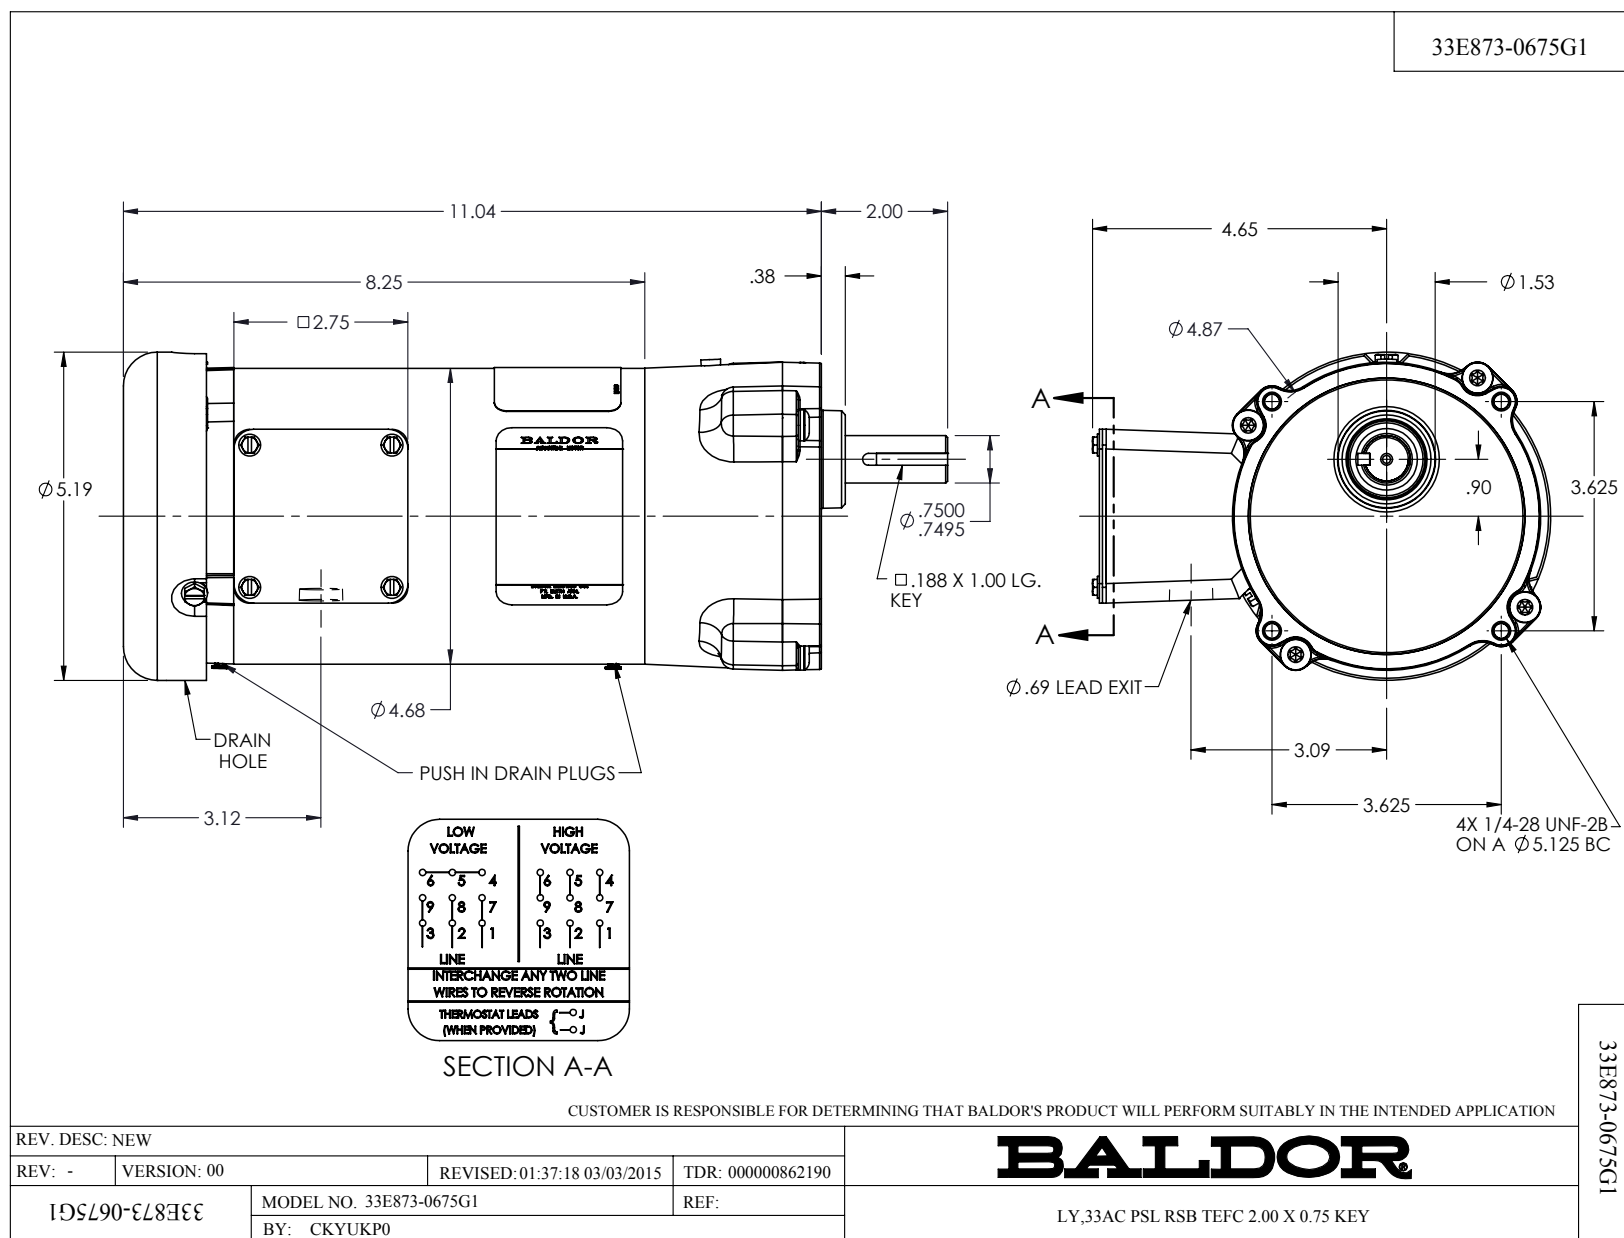

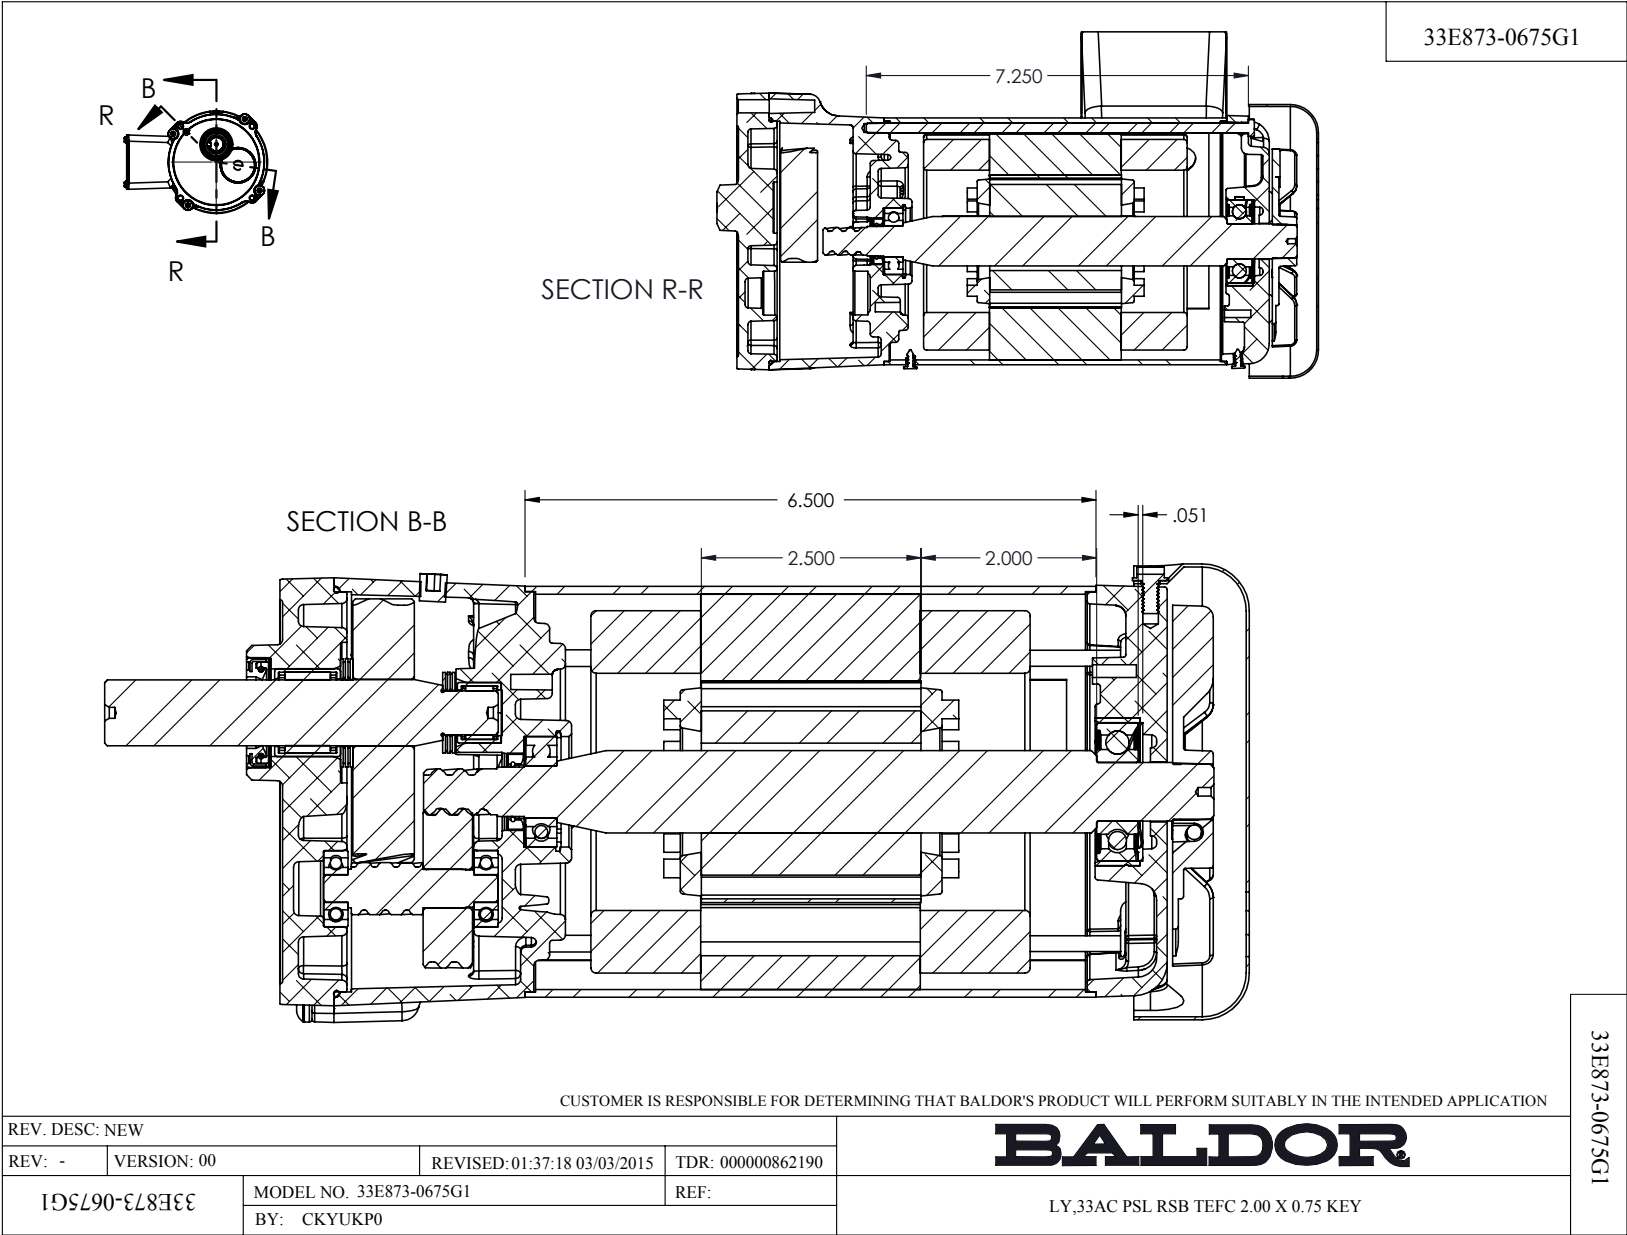

ITEM NO.	PART NUMBER	QTY.
1	HG0077A12	1
2	HW4600F102	1
3	BMH1714	2
4	BG6002	1
5	HW5002A95	1
6	BH1163A02	1
7	HA4021A05	1
8	HW3064E05	1
9	33SH7251B01	1
10	33RC4120-00	1
11	BG6203C03	1
12	33SA9200B96	1
13	NS2512A01	1
14	34GS1029A01	1
15	34CB3002C	1
16	51XB1016A07	2
17	11XT1032G06	1
18	34GS1031A01	1
19	34CB4517	1
20	51XT0832A07	4
21	33EP3100A01	1
22	HW5109A05	1
23	HA3100A	2
24	33FN3000	1
25	12XN0832A16	1
26	HW1003A08	1
27	XY0832A02	1
28	33FH4000A01	1
29	51XB1016A06	3
30	SG0045B97	1
31	SG0045B98	1
32	CG0012A01	1
33	RM1020A22	1
34	BH1163A03	1
35	HW4600D39	1
36	60XM2520A12	4
37	NP1220	1
38	LC0005	1
39	LB1119	1
40	BMH1910	1
41	HA4067	2

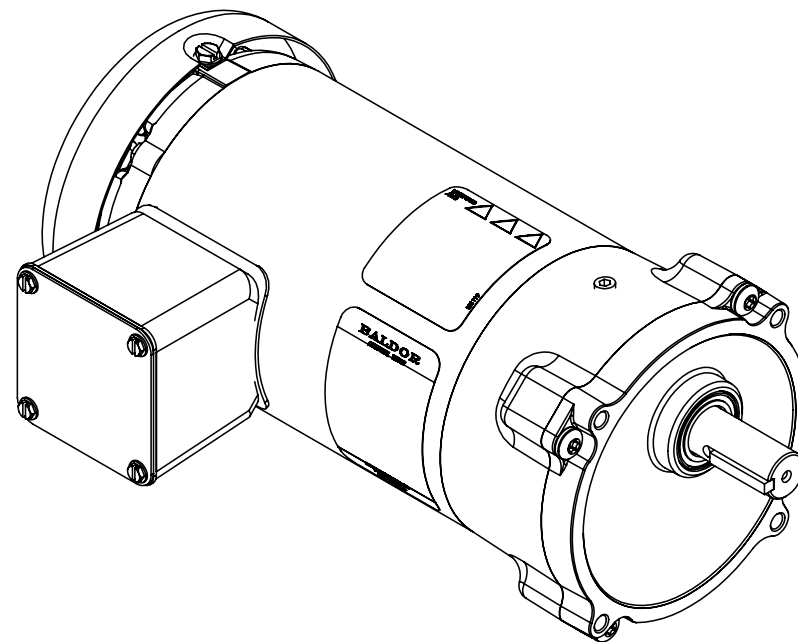

33E873-0675G1

33E873-0675G1

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: NEW

REV: -

VERSION: 00

REVISED: 01:37:18 03/03/2015

TDR: 000000862190

33E873-0675G1

MODEL NO. 33E873-0675G1




BY: CKYUKP0

REF:

BALDOR

LY,33AC PSL RSB TEFC 2.00 X 0.75 KEY

CD0005A05

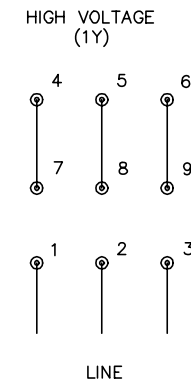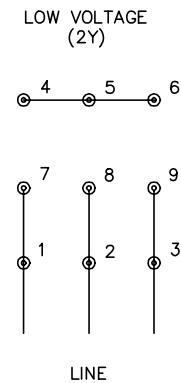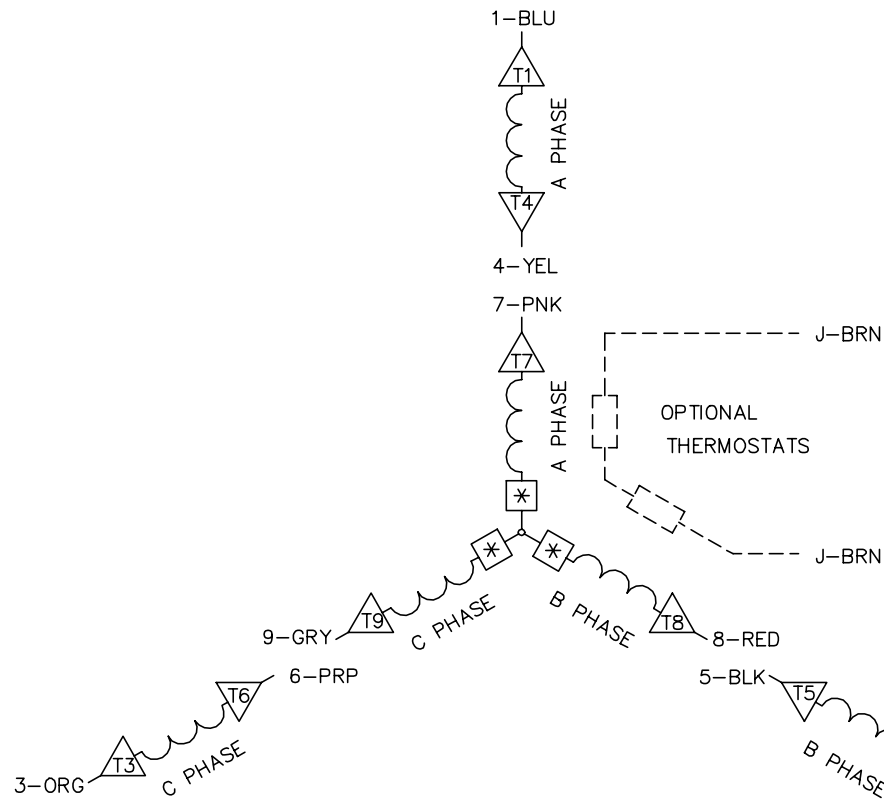

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.
5. =MAGNET WIRE COIL END WITH I.D. NUMBER.
6. =MAGNET WIRE COIL END WITH I.D. SYMBOL.
7. SEE CW PRINT FOR NEST TO NEST CROSSOVER CONNECTIONS.

REV. DESC: ADD NEST NOTE

REV. LTR: C

VERSION: 03

TDR: 000000445597

CD0005A05

FILE: \CKA\00024\847

REVISED: 12:51:06 11/15/2007

MTL: -

BY: CKMICRO

BALDOR • DODGE • RELIANCE

3PH, DV, 9 LEADS, CK

CD0005A05