

Diesel Exhaust Fluid (DEF) Suction Kit

334204C

EN


For evacuating diesel exhaust fluid from a large IBC Tote or a 55 gallon drum used in a DEF System. For professional use only.

Kit No. 2008319 - RSV, adaptable



Important Safety Instructions

Read all warnings and instructions in this manual and in your Diesel Exhaust Fluid (DEF) System Instruction manual, before using the equipment. Be familiar with the proper control and usage of the equipment. Save these instructions.

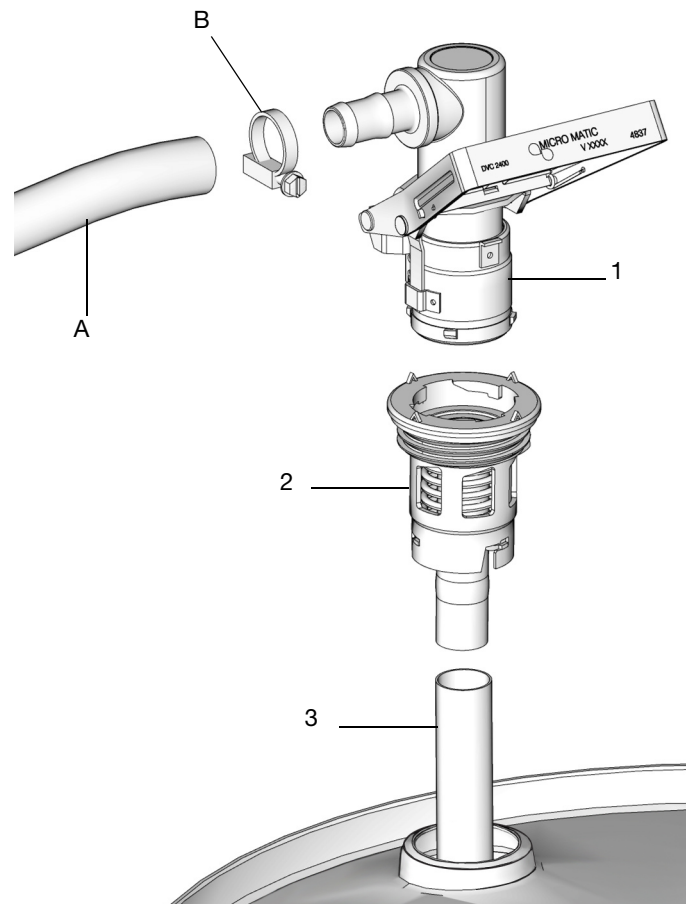

Parts

Part	Ref No.	Description	Qty
1	17C908	COUPLER, included in Kit 24W143, 24W144, and 24W145	1
2	127637	CONTAINER VALVE, included in Kit 24W143, 24W144, and 24W145	1
3	2008242	DOWN TUBE	1

Installation

See the figure on page 1 for these instructions.

NOTE: The down tube (3) allows for full evacuation of the container. It may bend slightly when installed.

1. Connect the down tube (3) to the container valve (2).
2. Measure the depth of the drum or tote add a few inches to the container depth. the cut should be 90 degrees to the tube axis.
3. Insert the down tube (3) into the drum or tote. The tube may bend along the bottom of the drum or tote.
4. Install the dispense coupler (1) into the container valve (2), then hand tighten the container valve.
5. Connect the pump section hose (A) to the hose barb on the dispense coupler. Use a flat-blade screw driver to tighten the hose clamp (B).

Recycling and Disposal

End of Product Life

At the end of a product's useful life, recycle it in a responsible manner

Technical Specifications

Diesel Exhaust Fluid (DEF) Suction Kit	
	US
Container Valve Thread	2.5 in. x 5 buttress
Dispense Coupler Hose-barb size	3.4 in.
Materials of Construction	
Wetted materials	Stainless steel, HDPE, EPDM rubber

California Proposition 65

CALIFORNIA RESIDENTS

 **WARNING:** Cancer and reproductive harm – www.P65warnings.ca.gov.

Graco Information

For the latest information about Graco products, visit www.graco.com.

For patent information, see www.graco.com/patents.

TO PLACE AN ORDER, contact your Graco distributor or call to identify the nearest distributor.

Toll Free Phone Number: 1-800-328-0211

All written and visual data contained in this document reflects the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Original instructions. This manual contains English. MM 334204

Graco Headquarters: Minneapolis

International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA
Copyright 2014, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com

Revision C, October 2024